

# MC760

## COMMERCIAL ROOFING

### DETAIL LIST

		<u>Revision</u>	<u>Date</u>
D 00 / 17	COVER SHEET		
D 01 / 17	RIDGE WITH PROFILED APEX	1.0	JAN 2023
D 02 / 17	RIDGE WITH NON PROFILED APEX	1.0	JAN 2023
D 03 / 17	SAWTOOTH RIDGE	1.0	JAN 2023
D 04 / 17	INTERNAL GUTTER	1.0	JAN 2023
D 05 / 17	FLUSH EAVE WITH PAN FIXED GUTTER	1.0	JAN 2023
D 06 / 17	FLUSH EAVE WITH EXTERNAL GUTTER BRACKET	1.0	JAN 2023
D 07 / 17	BARGE WITH PROFILED CLADDING	1.0	JAN 2023
D 08 / 17	BARGE OVERHANG	1.0	JAN 2023
D 09 / 17	PARAPET WITH TRANSVERSE APRON	1.0	JAN 2023
D 10 / 17	TRANSVERSE APRON	1.0	JAN 2023
D 11 / 17	PARALLEL APRON	1.0	JAN 2023
D 12 / 17	PARALLEL HIDDEN GUTTER	1.0	JAN 2023
D 13 / 17	PARALLEL HIDDEN GUTTER (2 PART FLASHING)	1.0	JAN 2023
D 14 / 17	ROOF STEP	1.0	JAN 2023
D 15 / 17	TRANSLUCENT SHEETS - LONG SECTION	1.0	JAN 2023
D 16 / 17	TRANSLUCENT SHEETS - CROSS	1.0	JAN 2023
D 17 / 17	3D TRANSLUCENT SHEETS	1.0	JAN 2023

PRE-FINISHED RIDGE CAP FLASHING

STOPENDS TO ROOF CLADDING

METALCRAFT MC760 ROOFING

SOFT EDGE OR NOTCHED DRESSED OVER MC760 RIBS

PRE-FINISHED SELF DRILLING/TAPPING SCREW WITH NEOPRENE WASHER

METALCRAFT MSS PURLIN BY ENGINEER

STRUCTURAL STEEL FRAMING BY ENGINEER

PERMEABLE UNDERLAY & NETTING SHOWN DASHED

SAFETY MESH TO WORKSAFE NZ REQUIREMENTS


\* MC760 MIN. ROOF PITCH = 3°

AS PER E2/ASI			
	<p><b>SITUATION 1</b></p> <p>1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH ≥ 10°</p>	<p><b>SITUATION 2</b></p> <p>1. VERY HIGH WIND ZONE 2. LOW, MEDIUM &amp; HIGH WIND ZONES WHERE ROOF PITCH ≤ 10°</p>	<p><b>SITUATION 3</b></p> <p>1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.</p>
X	<p>MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)</p>	<p>MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)</p>	<p>MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)</p>


AS PER MRM CODE OF PRACTICE	
<p><b>CATEGORY A</b></p> <p>1. NORMAL EXPOSURE 2. ROOF PITCH &gt;10°</p>	<p><b>CATEGORY B</b></p> <p>1. EXPOSED (HIGHER RISK) &amp; WIND LOAD EXCEEDS 1.5 kPa. 2. ROOF PITCH &lt;10°</p>
X	<p>MIN. 130mm</p>

AS PER E2/ASI			
	<b>SITUATION 1</b> 1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH $\geq 10^\circ$	<b>SITUATION 2</b> 1. VERY HIGH WIND ZONE 2. LOW, MEDIUM & HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	<b>SITUATION 3</b> 1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
X	MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)

\* MC760 MIN. ROOF PITCH = 3°

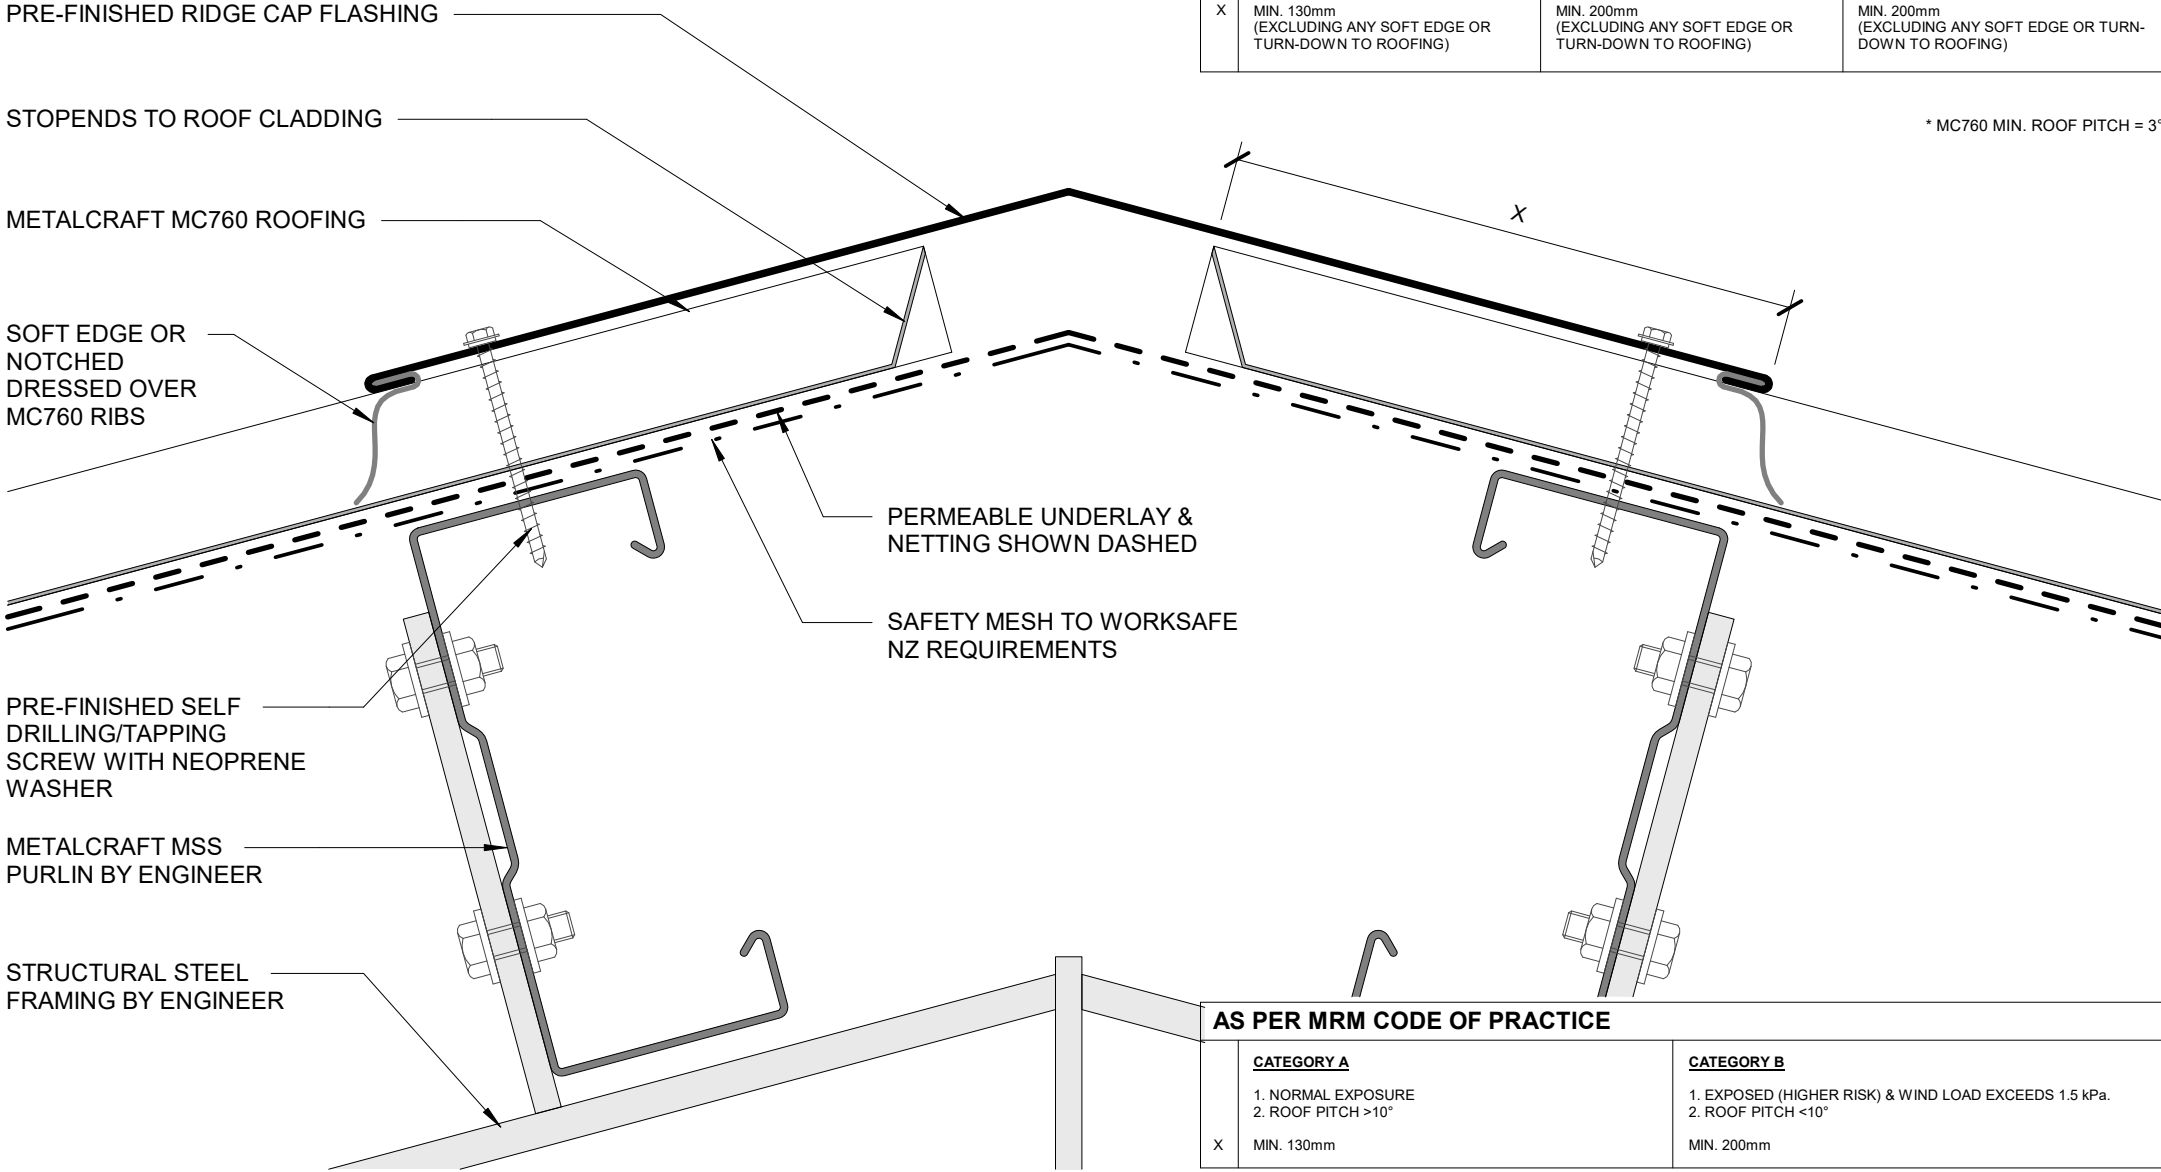


AS PER MRM CODE OF PRACTICE	
<b>CATEGORY A</b> 1. NORMAL EXPOSURE 2. ROOF PITCH $>10^\circ$	<b>CATEGORY B</b> 1. EXPOSED (HIGHER RISK) & WIND LOAD EXCEEDS 1.5 kPa. 2. ROOF PITCH $<10^\circ$
X MIN. 130mm	MIN. 200mm

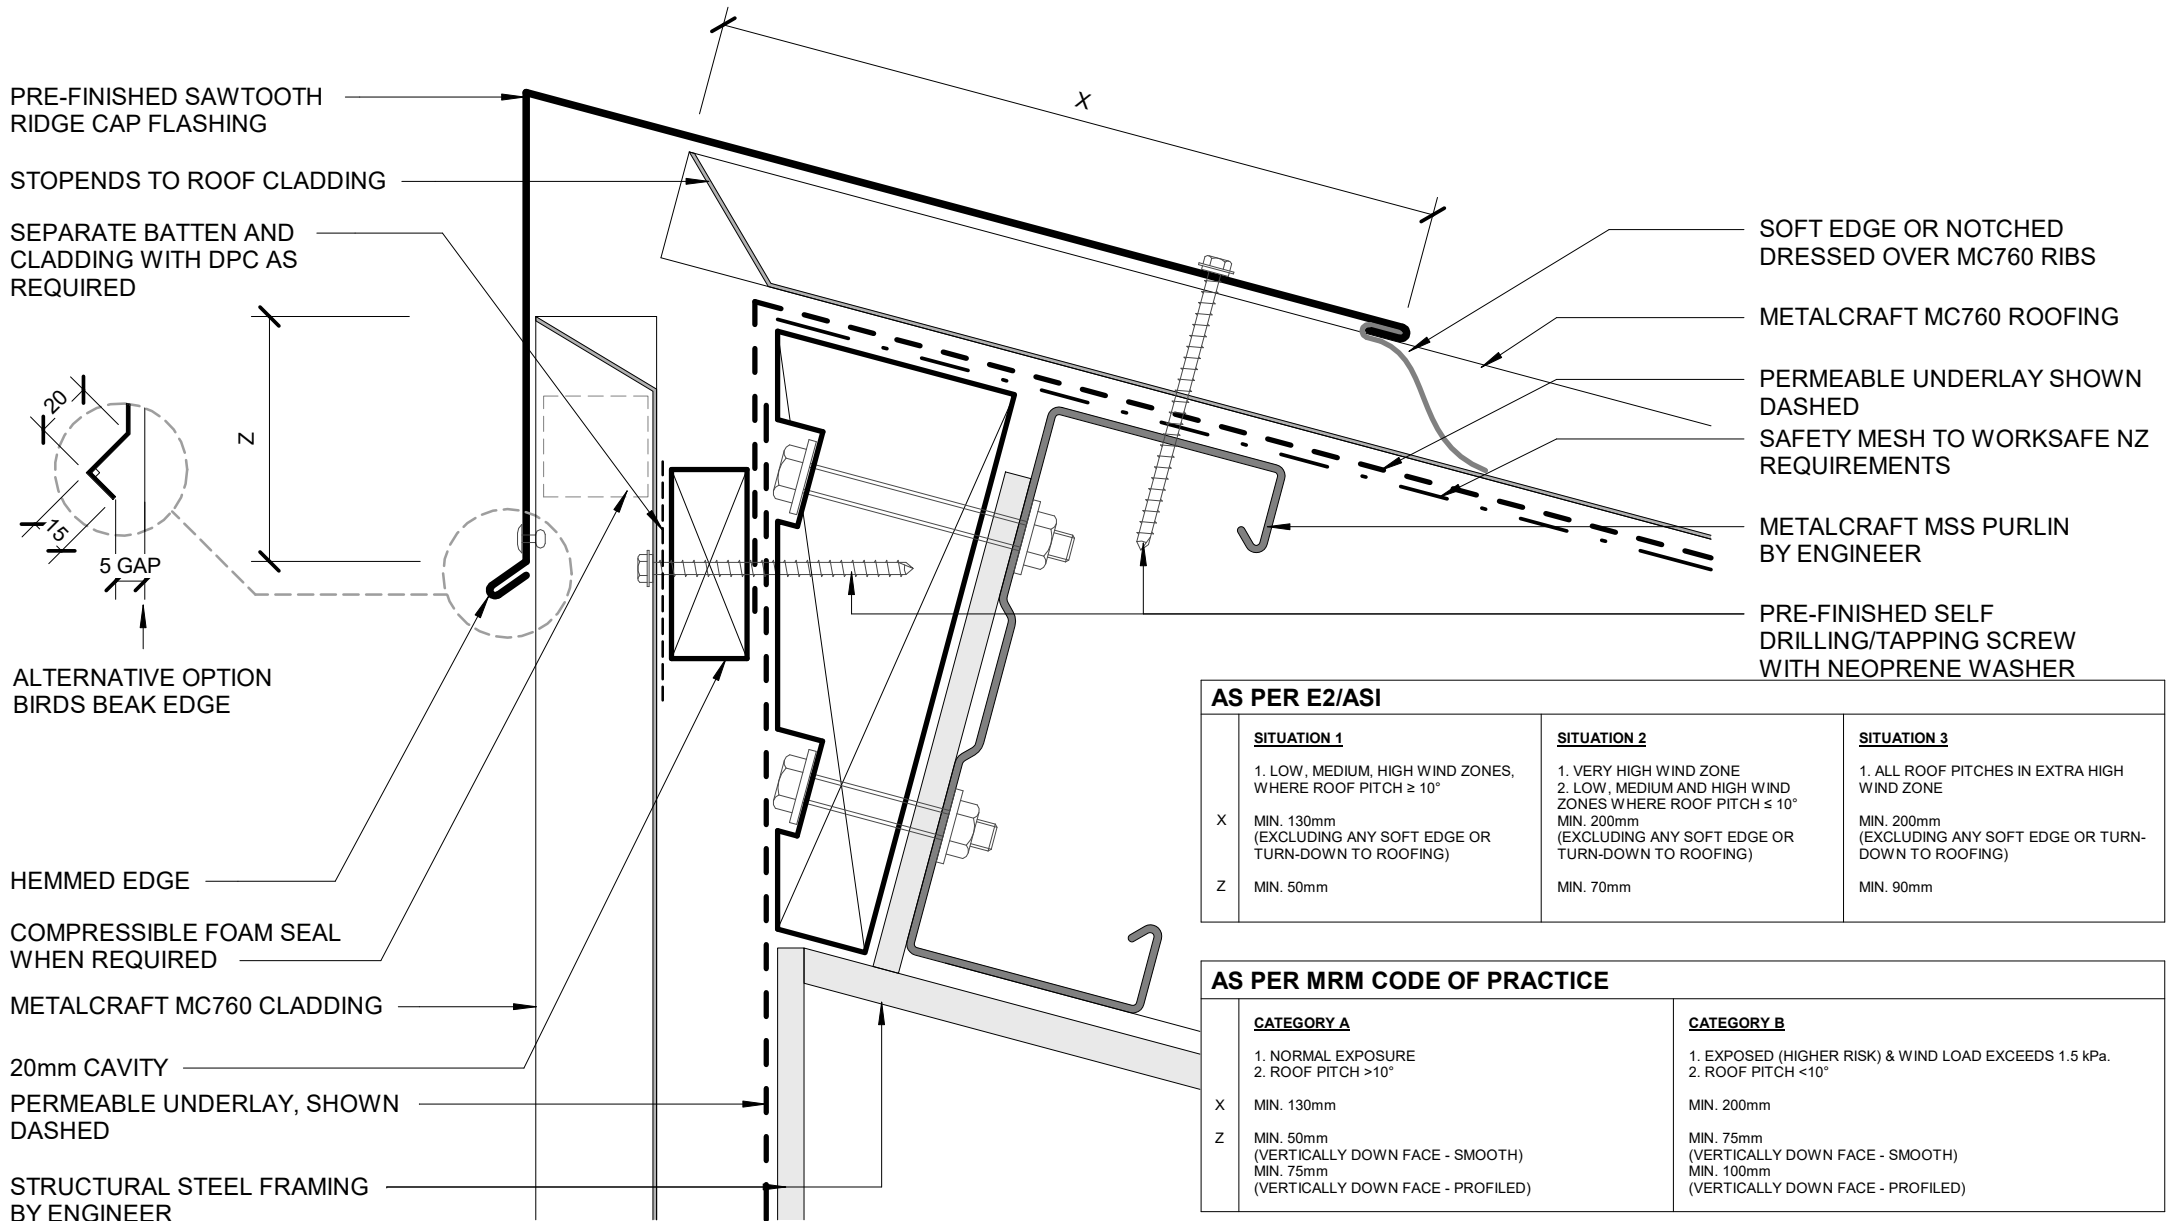

AS PER E2/ASI			
	SITUATION 1	SITUATION 2	SITUATION 3
	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH ≥ 10°	1. VERY HIGH WIND ZONE 2. LOW, MEDIUM AND HIGH WIND ZONES WHERE ROOF PITCH ≤ 10°	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE
X	MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)
Z	MIN. 50mm	MIN. 70mm	MIN. 90mm

AS PER MRM CODE OF PRACTICE		
	CATEGORY A	CATEGORY B
	1. NORMAL EXPOSURE 2. ROOF PITCH >10°	1. EXPOSED (HIGHER RISK) & WIND LOAD EXCEEDS 1.5 kPa. 2. ROOF PITCH <10°
X	MIN. 130mm	MIN. 200mm
Z	MIN. 50mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 75mm (VERTICALLY DOWN FACE - PROFILED)	MIN. 75mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 100mm (VERTICALLY DOWN FACE - PROFILED)

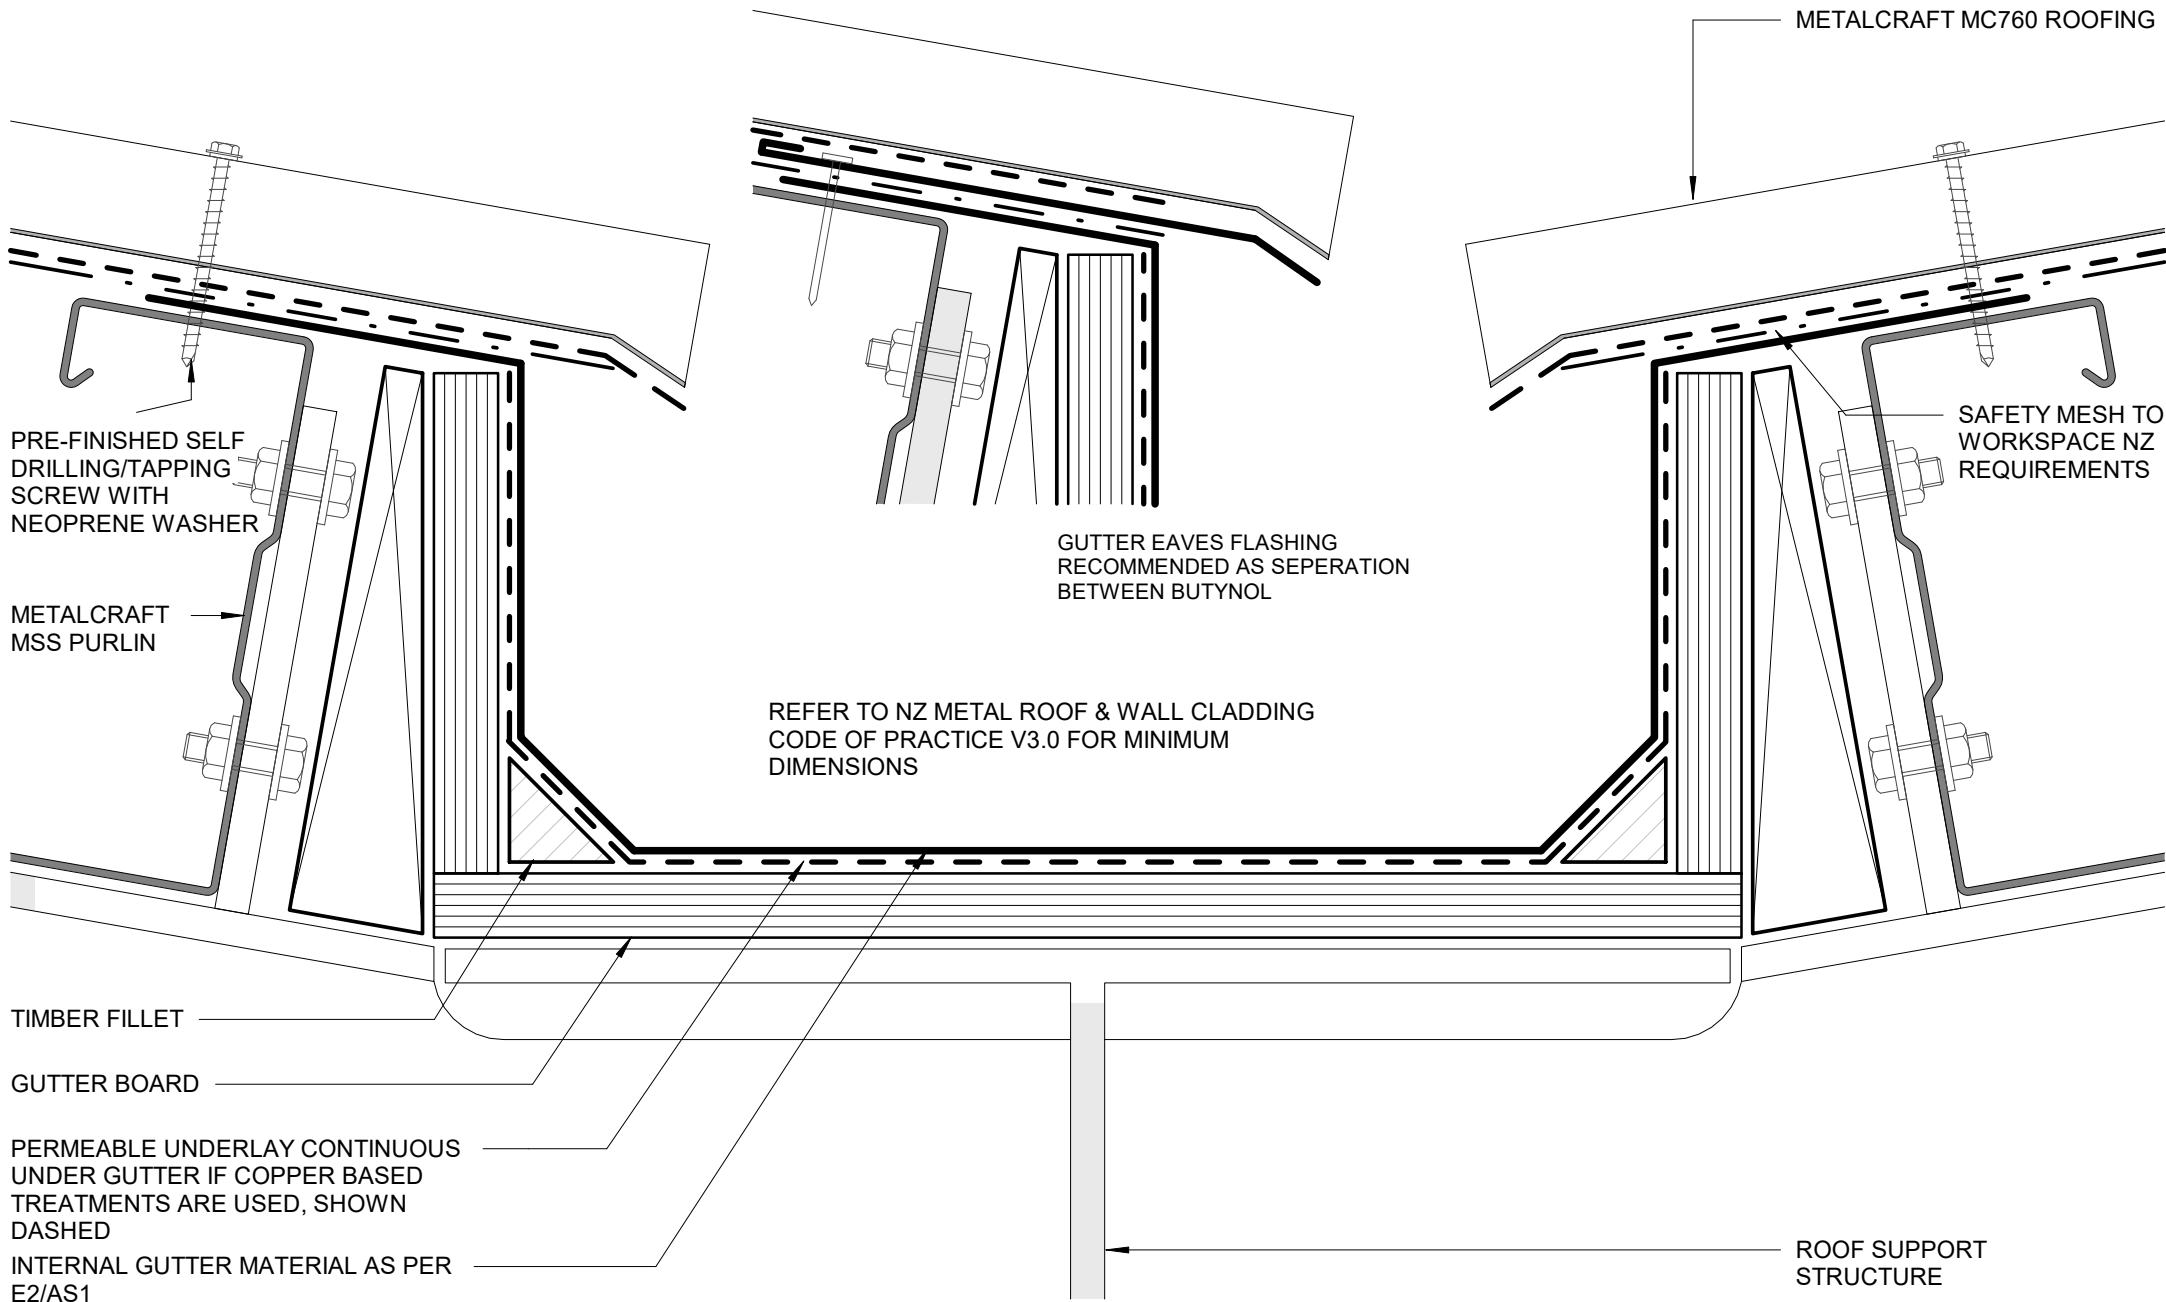

PRE-FINISHED SELF DRILLING/TAPPING SCREW WITH NEOPRENE WASHER

METALCRAFT MSS PURLIN

TIMBER FILLET

GUTTER BOARD

PERMEABLE UNDERLAY CONTINUOUS UNDER GUTTER IF COPPER BASED TREATMENTS ARE USED, SHOWN DASHED

INTERNAL GUTTER MATERIAL AS PER E2/AS1

GUTTER EAVES FLASHING RECOMMENDED AS SEPERATION BETWEEN BUTYNOL

REFER TO NZ METAL ROOF & WALL CLADDING CODE OF PRACTICE V3.0 FOR MINIMUM DIMENSIONS

METALCRAFT MC760 ROOFING

SAFETY MESH TO WORKSPACE NZ REQUIREMENTS

ROOF SUPPORT STRUCTURE

**Metalcraft**  
Roofing

www.metalcraftgroup.co.nz

DISCLAIMER:  
All details are to be used for indicative purposes only and the designer should consult both the MRM code of practice version 3.0 / 2022, E2 and all other relevant building codes  
Details of the supporting mechanisms are indicative only. Compliance of the supporting mechanisms is the responsibility of the designer. Construction detail can vary for wall cladding. The underlay is detailed as a single line for simplicity and is indicative only. Building paper type and method of installation should comply with underlay manufacturers recommendations and NZBC regulations.

MC760

Rev. 1.0

Reference CRMC760

Date JAN 2023

Scale 1 : 2

**INTERNAL GUTTER**  
COMMERCIAL ROOFING

Sheet **D 04 / 17**

EAVE FLASHING REQUIRED WHEN ALL OF THE FOLLOWING CONDITIONS ARE MET:  
 ROOF PITCH  $\leq 10^\circ$   
 SOFFIT WIDTH  $\leq 100\text{mm}$   
 WIND ZONES = VERY HIGH OR EXTRA HIGH  
 ENGINEER SPECIFIC DESIGN  
 MRM RECOMMENDS TO USE IN AREAS EXPOSED TO CONTAMINATORS SUCH AS SEA SALT OR INDUSTRIAL POLLUTANTS

$<10^\circ$  UN-BAFFLED BY SPOUTING = 70mm  
 $10-35^\circ = 50\text{mm}$   
 $>35^\circ = 40\text{mm}$

\* MC700  
 MIN. ROOF PITCH =  $3^\circ$   
 $15.00^\circ$

FOAM CLOSURE USED AS REQUIRED

PERMEABLE UNDERLAY & NETTING SHOWN DASHED

METALCRAFT MC760 ROOFING

PRE-FINISHED EAVE FLASHING

METALCRAFT BOX GUTTER 125 WITH EXTERNAL BRACKET

PRE-FINISHED SELF DRILLING/TAPPING SCREW WITH NEOPRENE WASHER

SEPARATE BATTEN AND CLADDING WITH DPC AS REQUIRED

METALCRAFT MC760 CLADDING ON CAVITY

METALCRAFT MSS PURLIN BY ENGINEER

DIMENSION TO SUIT  
 SUGGEST MIN. 125mm

MIN. 35mm  
 OVERLAP

PACKER

SAFETY MESH TO WORKSAFE NZ REQUIREMENTS

PRE-FINISHED SELF DRILLING/TAPPING SCREW WITH NEOPRENE WASHER

STRUCTURAL STEEL FRAMING BY ENGINEER



DISCLAIMER:  
 All details are to be used for indicative purposes only and the designer should consult both the MRM code of practice version 3.0 / 2022, E2 and all other relevant building codes.  
 Details of the supporting mechanisms are indicative only. Compliance of the supporting mechanisms is the responsibility of the designer. Construction detail can vary for wall cladding. The underlay is detailed as a single line for simplicity and is indicative only. Building paper type and method of installation should comply with underlay manufacturers recommendations and NZBC regulations.

EAVE FLASHING REQUIRED WHEN ALL OF THE FOLLOWING CONDITIONS ARE MET:  
 ROOF PITCH  $\leq 10^\circ$   
 SOFFIT WIDTH  $\leq 100\text{mm}$   
 WIND ZONES = VERY HIGH OR EXTRA HIGH  
 ENGINEER SPECIFIC DESIGN  
 MRM RECOMMENDS TO USE IN AREAS EXPOSED TO CONTAMINATORS SUCH AS SEA SALT OR INDUSTRIAL POLLUTANTS

$<10^\circ$  UN-BAFFLED BY SPOUTING = 70mm

10-35° = 50mm

$>35^\circ$  = 40mm

DIMENSION TO SUIT  
 SUGGEST MIN. 125mm

\* MC760  
 MIN. ROOF PITCH = 3°  
 15.00°

FOAM CLOSURE USED AS REQUIRED

PERMEABLE UNDERLAY & NETTING SHOWN DASHED

METALCRAFT MC760 ROOFING

PRE-FINISHED EAVE FLASHING

METALCRAFT BOX GUTTER 125 WITH EXTERNAL BRACKET

PRE-FINISHED SELF DRILLING/TAPPING SCREW WITH NEOPRENE WASHER

SEPARATE BATTEN AND CLADDING WITH DPC AS REQUIRED

FASCIA BOARD

SEPARATE WALL CLADDING AND FASCIA WITH DPC AS REQUIRED

METALCRAFT MC760 CLADDING ON CAVITY

METALCRAFT MSS PURLIN BY ENGINEER

PACKER

SAFETY MESH TO WORKSAFE NZ REQUIREMENTS

PRE-FINISHED SELF DRILLING/TAPPING SCREW WITH NEOPRENE WASHER

STRUCTURAL STEEL FRAMING BY ENGINEER

MIN. 35mm OVERLAP

**Metalcraft**  
 Roofing

www.metalcraftgroup.co.nz

DISCLAIMER:  
 All details are to be used for indicative purposes only and the designer should consult both the MRM code of practice version 3.0 / 2022, E2 and all other relevant building codes.  
 Details of the supporting mechanisms are indicative only. Compliance of the supporting mechanisms is the responsibility of the designer. Construction detail can vary for wall cladding. The underlay is detailed as a single line for simplicity and is indicative only. Building paper type and method of installation should comply with underlay manufacturers recommendations and NZBC regulations.

FLUSH EAVE WITH EXTERNAL GUTTER BRACKET

MC760

Rev. 1.0


COMMERCIAL ROOFING

Reference CRMC760

Date JAN 2023

Scale 1 : 2

Sheet **D 06 / 17**

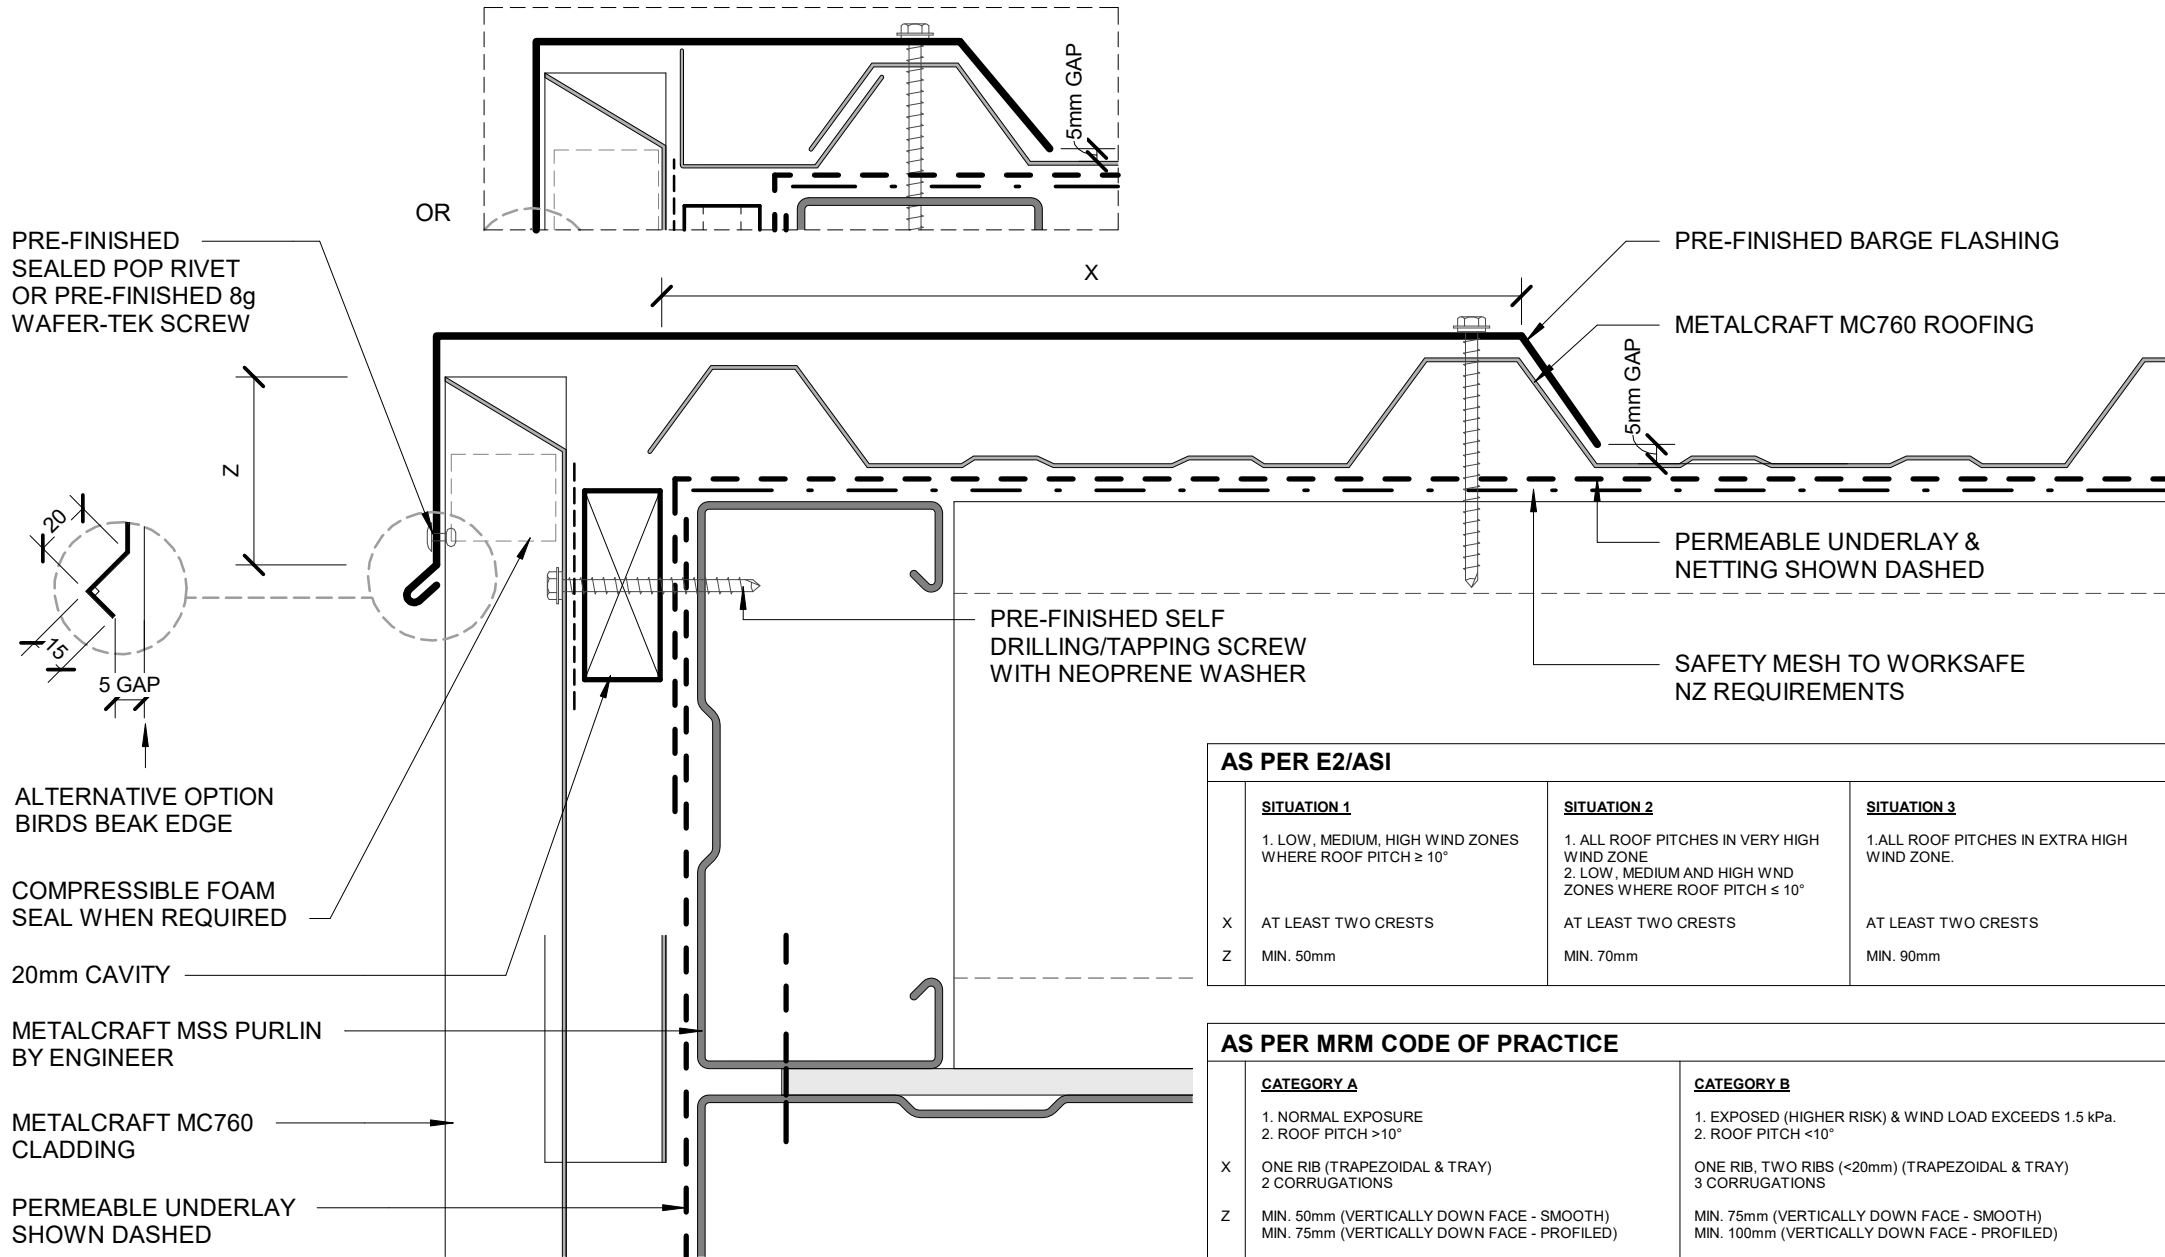

AS PER E2/ASI			
	SITUATION 1	SITUATION 2	SITUATION 3
	1. LOW, MEDIUM, HIGH WIND ZONES WHERE ROOF PITCH $\geq 10^\circ$	1. ALL ROOF PITCHES IN VERY HIGH WIND ZONE 2. LOW, MEDIUM AND HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
X	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS
Z	MIN. 50mm	MIN. 70mm	MIN. 90mm

AS PER MRM CODE OF PRACTICE		
	CATEGORY A	CATEGORY B
	1. NORMAL EXPOSURE 2. ROOF PITCH $>10^\circ$	1. EXPOSED (HIGHER RISK) & WIND LOAD EXCEEDS 1.5 kPa. 2. ROOF PITCH $<10^\circ$
X	ONE RIB (TRAPEZOIDAL & TRAY) 2 CORRUGATIONS	ONE RIB, TWO RIBS ( $<20\text{mm}$ ) (TRAPEZOIDAL & TRAY) 3 CORRUGATIONS
Z	MIN. 50mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 75mm (VERTICALLY DOWN FACE - PROFILED)	MIN. 75mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 100mm (VERTICALLY DOWN FACE - PROFILED)

**Metalcraft**  
Roofing

www.metalcraftgroup.co.nz

**DISCLAIMER:**  
All details are to be used for indicative purposes only and the designer should consult both the MRM code of practice version 3.0 / 2022, E2 and all other relevant building codes. Details of the supporting mechanisms are indicative only. Compliance of the supporting mechanisms is the responsibility of the designer. Construction detail can vary for wall cladding. The underlay is detailed as a single line for simplicity and is indicative only. Building paper type and method of installation should comply with underlay manufacturers recommendations and NZBC regulations.

**BARGE WITH PROFILED CLADDING**

MC760

Rev. 1.0

COMMERCIAL ROOFING


Reference CRMC760

Date JAN 2023

Scale 1 : 2


Sheet **D 07 / 17**



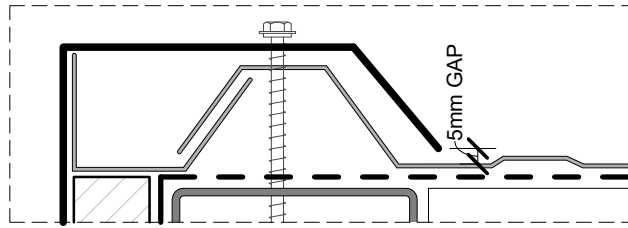

PRE-FINISHED BARGE FLASHING

METALCRAFT MC760 ROOFING

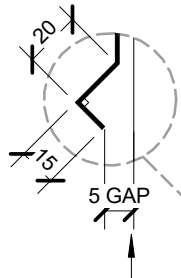

ALTERNATIVE OPTION  
BIRDS BEAK EDGE  
HEMMED EDGE

Z

PRE-FINISHED SELF  
DRILLING/TAPPING SCREW  
WITH NEOPRENE WASHER

PRE-FINISHED SELF  
DRILLING/TAPPING SCREW  
WITH NEOPRENE WASHER

METALCRAFT  
MSS PURLIN  
BY ENGINEER

PERMEABLE UNDERLAY &  
NETTING SHOWN DASHED

BARGE BOARD

SOFFIT LINING

**AS PER E2/ASI**

	<b>SITUATION 1</b>	<b>SITUATION 2</b>	<b>SITUATION 3</b>
	1. LOW, MEDIUM, HIGH WIND ZONES WHERE ROOF PITCH $\geq 10^\circ$	1. ALL ROOF PITCHES IN VERY HIGH WIND ZONE 2. LOW, MEDIUM AND HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE.
X	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS
Z	MIN. 50mm	MIN. 70mm	MIN. 90mm

**AS PER MRM CODE OF PRACTICE**

	<b>CATEGORY A</b>	<b>CATEGORY B</b>
	1. NORMAL EXPOSURE 2. ROOF PITCH $>10^\circ$	1. EXPOSED (HIGHER RISK) & WIND LOAD EXCEEDS 1.5 kPa. 2. ROOF PITCH $<10^\circ$
X	ONE RIB (TRAPEZOIDAL & TRAY) 2 CORRUGATIONS	ONE RIB, TWO RIBS ( $<20\text{mm}$ ) (TRAPEZOIDAL & TRAY) 3 CORRUGATIONS
Z	MIN. 50mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 75mm (VERTICALLY DOWN FACE - PROFILED)	MIN. 75mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 100mm (VERTICALLY DOWN FACE - PROFILED)

**Metalcraft**  
Roofing

www.metalcraftgroup.co.nz

**DISCLAIMER:**  
All details are to be used for indicative purposes only and the designer should consult both the MRM code of practice version 3.0 / 2022, E2 and all other relevant building codes. Details of the supporting mechanisms are indicative only. Compliance of the supporting mechanisms is the responsibility of the designer. Construction detail can vary for wall cladding. The underlay is detailed as a single line for simplicity and is indicative only. Building paper type and method of installation should comply with underlay manufacturers recommendations and NZBC regulations.

MC760

Rev. 1.0

Reference CRMC760

Date JAN 2023

**BARGE OVERHANG**  
COMMERCIAL ROOFING

Scale 1 : 2

Sheet **D 08 / 17**

COMPRESSIBLE FOAM SEAL WHEN REQUIRED

CONTINUOUS  
TIMBER PACKING

PRE-FINISHED  
PARAPET CAP  
FLASHING

Z

SEPARATE BATTEN  
AND CLADDING WITH  
DPC AS REQUIRED

PRE-FINISHED FLAT  
HEAD EXPANDING  
MASONRY ANCHOR  
SCREW WITH  
NEOPRENE WASHER  
FOR FLASHING

PVC CAVITY CLOSER

METALCRAFT MC760  
CLADDING ON CAVITY

PERMEABLE  
UNDERLAY &  
NETTING SHOWN  
DASHED

STOPENDS ROOF  
CLADDING

METALCRAFT MSS  
PURLIN BY ENGINEER

CONCRETE WALL  
BY ENGINEER

MIN. 5.00°

Z

N

G

L

\* MC760  
MIN. ROOF PITCH = 3°

15.00°

**AS PER E2/ASI**

	<b>SITUATION 1</b>	<b>SITUATION 2</b>	<b>SITUATION 3</b>
	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH ≥ 10°	1. VERY HIGH WIND ZONE 2. LOW, MEDIUM AND HIGH WIND ZONES WHERE ROOF PITCHES ≤ 10°	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE
G	MIN. 35mm	MIN. 35mm	MIN. 35mm
N	MIN. 75mm	MIN. 75mm	MIN. 75mm
L	MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)	MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)
Z	MIN. 50mm	MIN. 70mm	MIN. 90mm

**AS PER MRM CODE OF PRACTICE**

	<b>CATEGORY A</b>	<b>CATEGORY B</b>
	1. NORMAL EXPOSURE 2. ROOF PITCH >10°	1. EXPOSED (HIGHER RISK) & WIND LOAD EXCEEDS 1.5 kPa. 2. ROOF PITCH <10°
G	25mm	25mm
N	MIN. 50mm + HEM OR 75mm (VERTICALLY UP FACE - SMOOTH) MIN. 75mm + HEM OR 100mm (VERTICALLY UP FACE - PROFILED)	MIN. 75mm + HEM OR 100mm (VERTICALLY UP FACE - SMOOTH) MIN. 100mm + HEM OR 125mm (VERTICALLY UP FACE - PROFILED)
L	MIN. 150mm	MIN. 200mm
Z	MIN. 50mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 75mm (VERTICALLY DOWN FACE - PROFILED)	MIN. 75mm (VERTICALLY DOWN FACE - SMOOTH) MIN. 100mm (VERTICALLY DOWN FACE - PROFILED)

PRE-FINISHED APRON FLASHING

PRE-FINISHED SELF  
DRILLING/TAPPING SCREW WITH  
NEOPRENE WASHER

METALCRAFT MC760 ROOFING

SOFT EDGE OR NOTCHED DRESSED  
OVER MC760 RIBS

SAFETY MESH TO WORKSAFE NZ  
REQUIREMENTS

**PARAPET WITH TRANSVERSE APRON**

**Metalcraft**  
Roofing

www.metalcraftgroup.co.nz

DISCLAIMER:  
All details are to be used for indicative purposes only and the designer should consult both the MRM code of practice version 3.0 / 2022, E2 and all other relevant building codes.  
Details of the supporting mechanisms are indicative only. Compliance of the supporting mechanisms is the responsibility of the designer. Construction detail can vary for wall cladding. The underlay is detailed as a single line for simplicity and is indicative only. Building paper type and method of installation should comply with underlay manufacturers recommendations and NZBC regulations.

MC760

Rev. 1.0


COMMERCIAL ROOFING

Reference CRMC760

Date JAN 2023


Scale 1 : 2

Sheet **D 09 / 17**

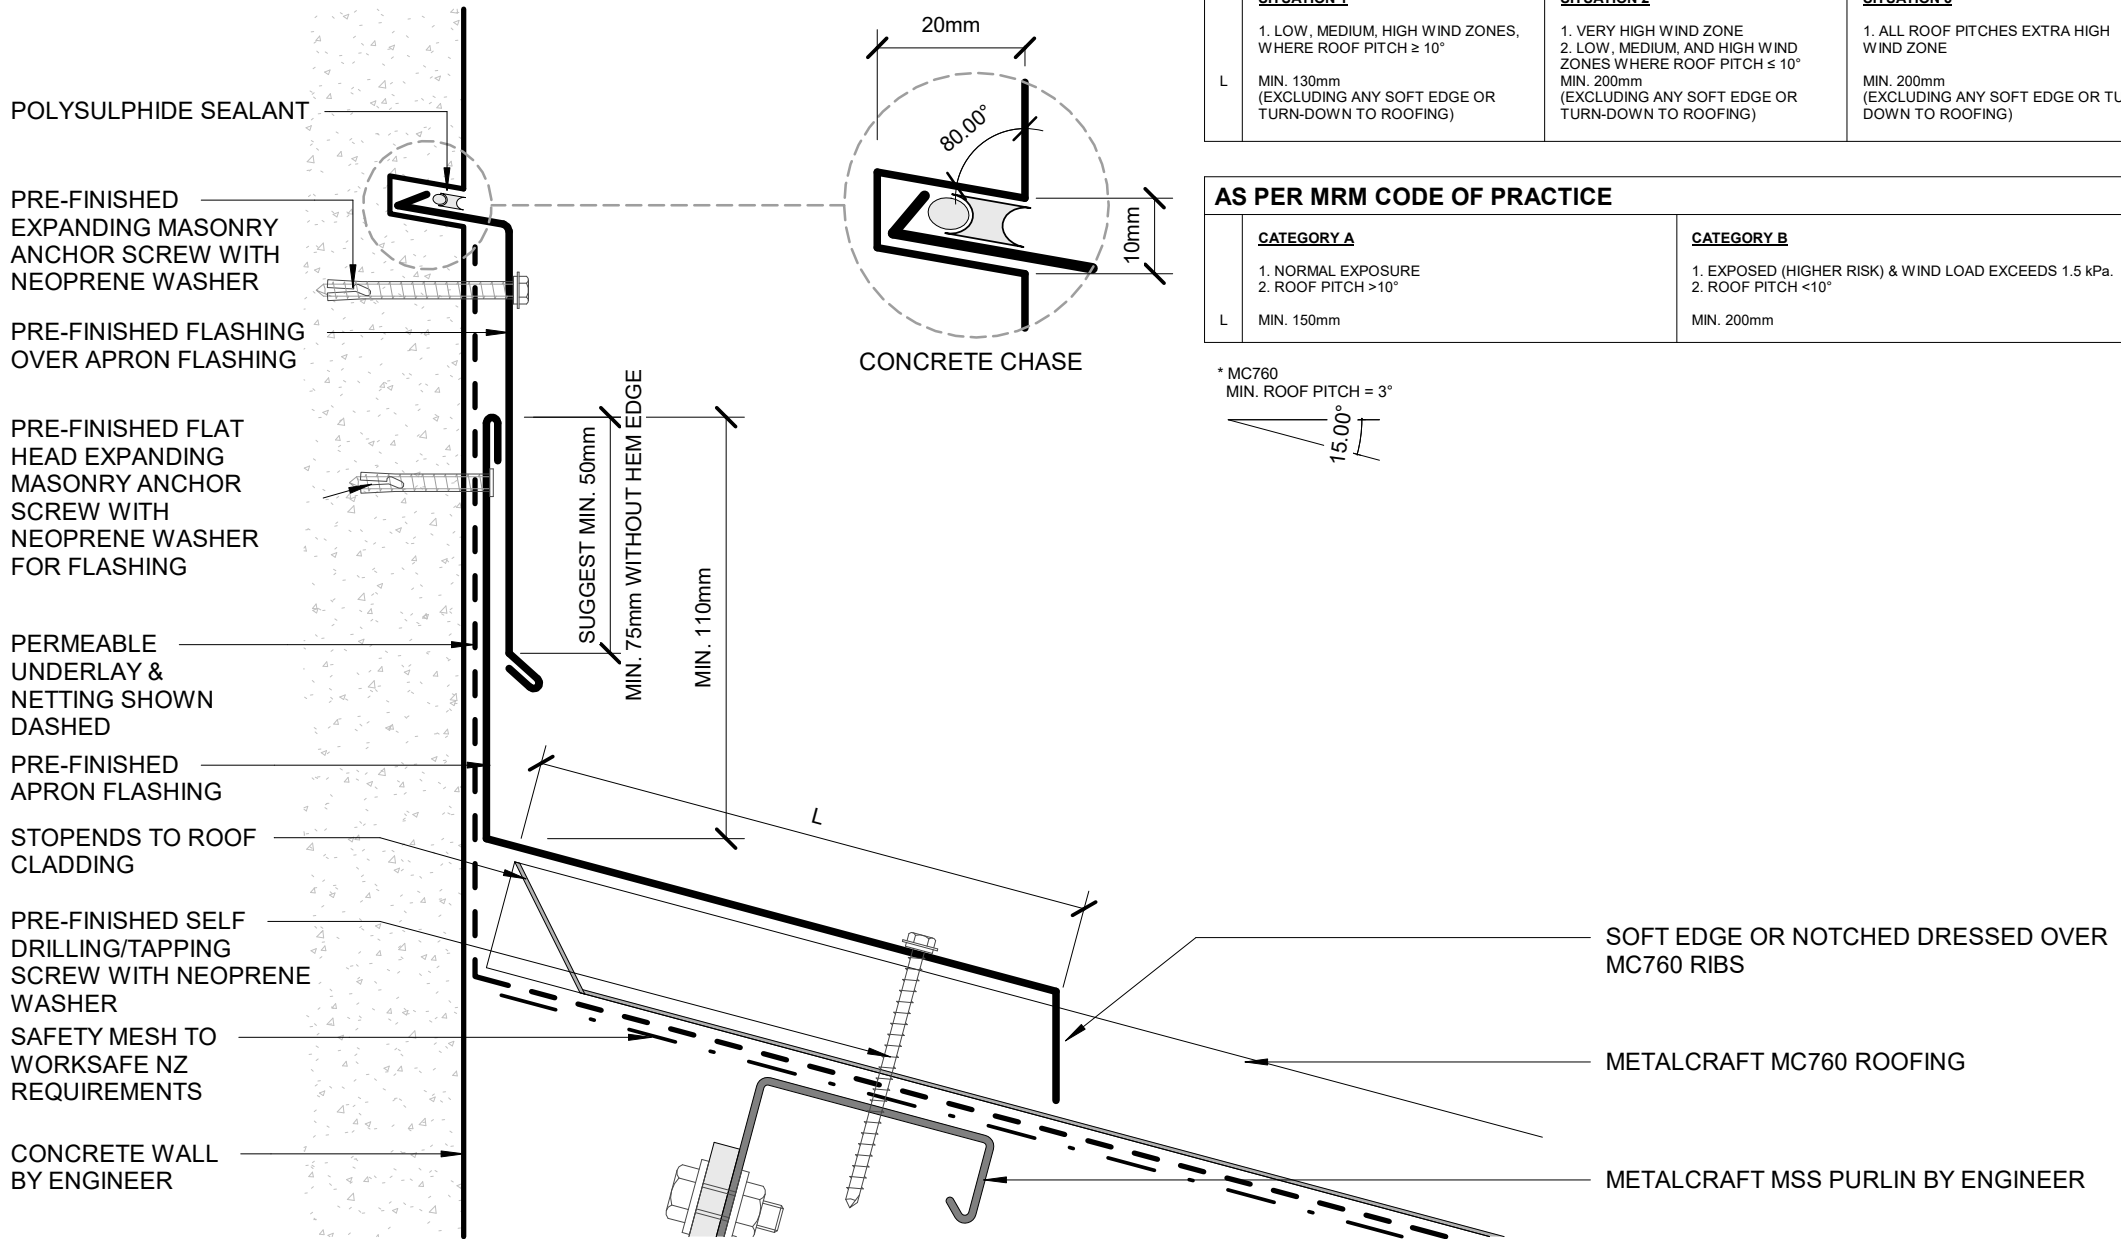

AS PER E2/ASI			
	<p><b>SITUATION 1</b></p> <p>1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH <math>\geq 10^\circ</math></p> <p>L MIN. 130mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)</p>	<p><b>SITUATION 2</b></p> <p>1. VERY HIGH WIND ZONE</p> <p>2. LOW, MEDIUM, AND HIGH WIND ZONES WHERE ROOF PITCH <math>\leq 10^\circ</math></p> <p>MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)</p>	<p><b>SITUATION 3</b></p> <p>1. ALL ROOF PITCHES EXTRA HIGH WIND ZONE</p> <p>MIN. 200mm (EXCLUDING ANY SOFT EDGE OR TURN-DOWN TO ROOFING)</p>

AS PER MRM CODE OF PRACTICE	
<p><b>CATEGORY A</b></p> <p>1. NORMAL EXPOSURE</p> <p>2. ROOF PITCH <math>&gt;10^\circ</math></p> <p>L MIN. 150mm</p>	<p><b>CATEGORY B</b></p> <p>1. EXPOSED (HIGHER RISK) &amp; WIND LOAD EXCEEDS 1.5 kPa.</p> <p>2. ROOF PITCH <math>&lt;10^\circ</math></p> <p>MIN. 200mm</p>

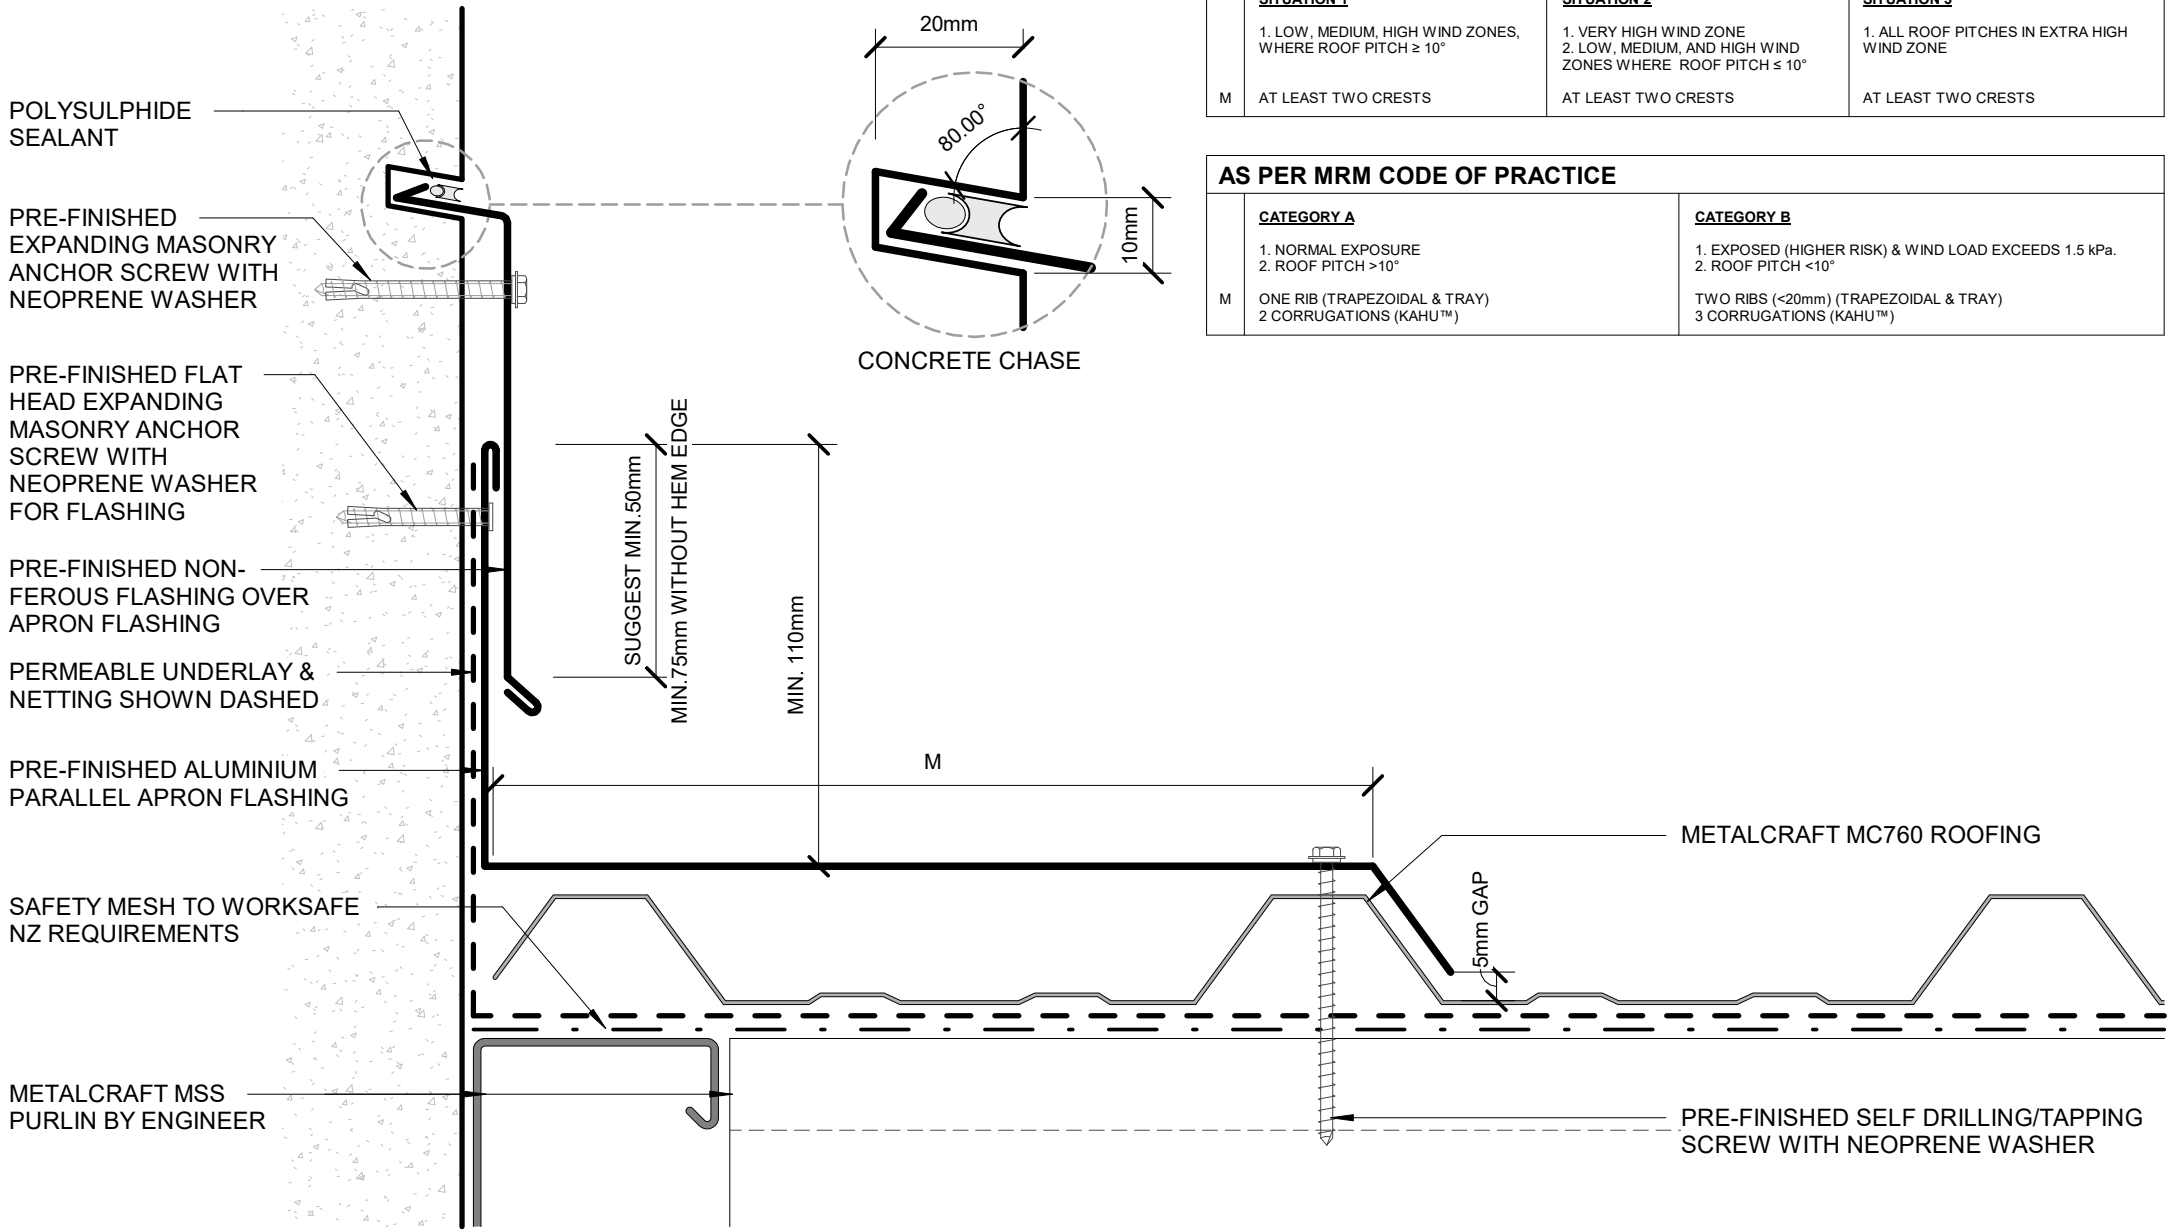


**AS PER E2/ASI**

	<b>SITUATION 1</b>	<b>SITUATION 2</b>	<b>SITUATION 3</b>
	1. LOW, MEDIUM, HIGH WIND ZONES, WHERE ROOF PITCH $\geq 10^\circ$	1. VERY HIGH WIND ZONE 2. LOW, MEDIUM, AND HIGH WIND ZONES WHERE ROOF PITCH $\leq 10^\circ$	1. ALL ROOF PITCHES IN EXTRA HIGH WIND ZONE
M	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS	AT LEAST TWO CRESTS

**AS PER MRM CODE OF PRACTICE**

	<b>CATEGORY A</b>	<b>CATEGORY B</b>
	1. NORMAL EXPOSURE 2. ROOF PITCH $> 10^\circ$	1. EXPOSED (HIGHER RISK) & WIND LOAD EXCEEDS 1.5 kPa. 2. ROOF PITCH $< 10^\circ$
M	ONE RIB (TRAPEZOIDAL & TRAY) 2 CORRUGATIONS (KAHU™)	TWO RIBS ( $< 20\text{mm}$ ) (TRAPEZOIDAL & TRAY) 3 CORRUGATIONS (KAHU™)

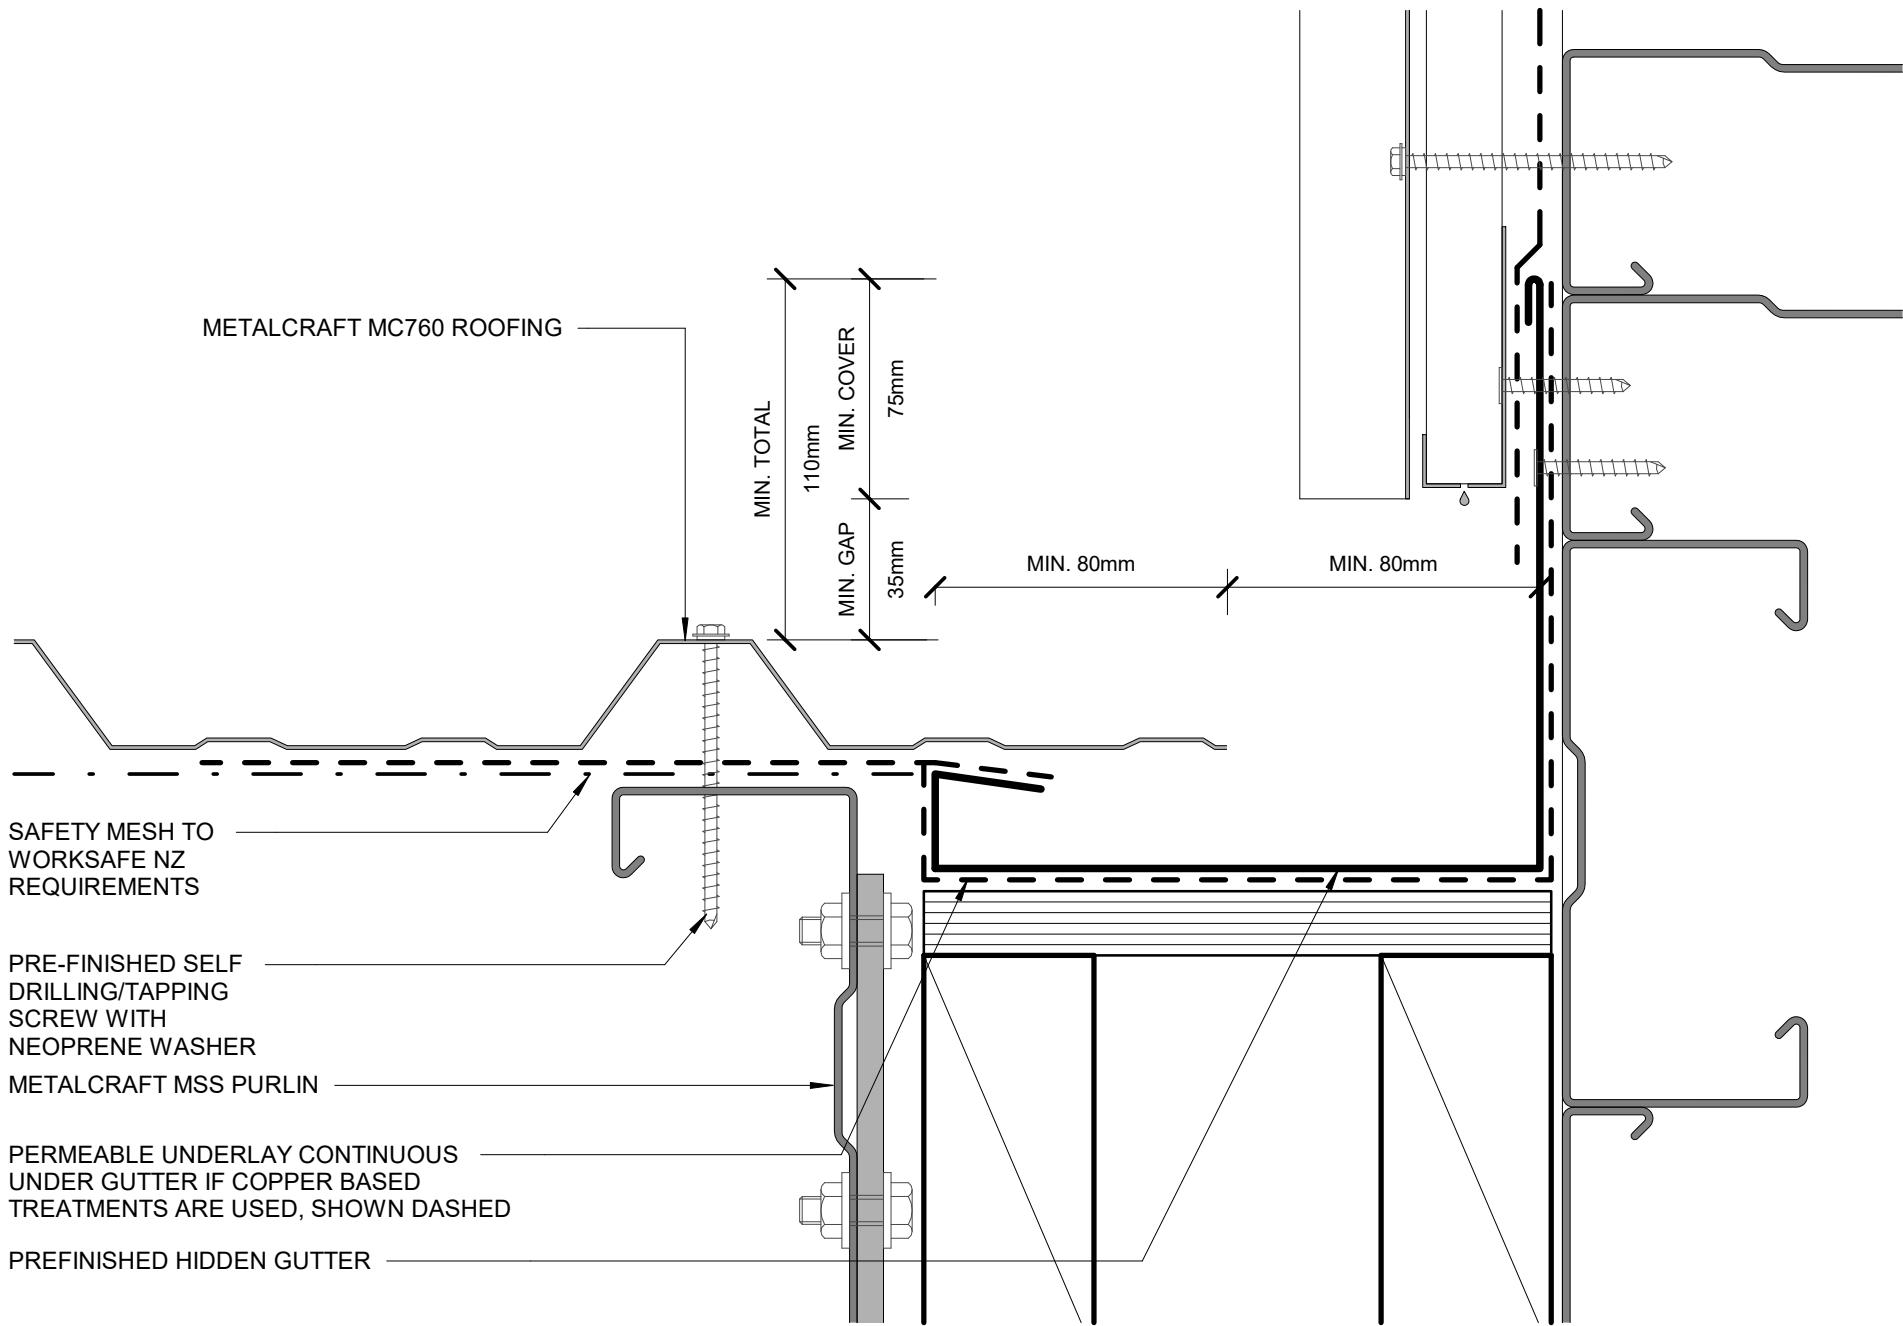

METALCRAFT MC760 ROOFING

MIN. TOTAL  
110mm  
MIN. COVER  
75mm  
MIN. GAP  
35mm

MIN. 80mm      MIN. 80mm

SAFETY MESH TO  
WORKSAFE NZ  
REQUIREMENTS

PRE-FINISHED SELF  
DRILLING/TAPPING  
SCREW WITH  
NEOPRENE WASHER

METALCRAFT MSS PURLIN

PERMEABLE UNDERLAY CONTINUOUS  
UNDER GUTTER IF COPPER BASED  
TREATMENTS ARE USED, SHOWN DASHED

PREFINISHED HIDDEN GUTTER

**PARALLEL HIDDEN GUTTER**  
**COMMERCIAL ROOFING**

**Metalcraft**  
Roofing

www.metalcraftgroup.co.nz

**DISCLAIMER:**  
All details are to be used for indicative purposes only and the designer should consult both the MRM code of practice version 3.0 / 2022, E2 and all other relevant building codes. Details of the supporting mechanisms are indicative only. Compliance of the supporting mechanisms is the responsibility of the designer. Construction detail can vary for wall cladding. The underlay is detailed as a single line for simplicity and is indicative only. Building paper type and method of installation should comply with underlay manufacturers recommendations and NZBC regulations.

MC760


Rev. 1.0

Reference CRMC760


Date JAN 2023

Scale 1 : 2

Sheet **D 12 / 17**

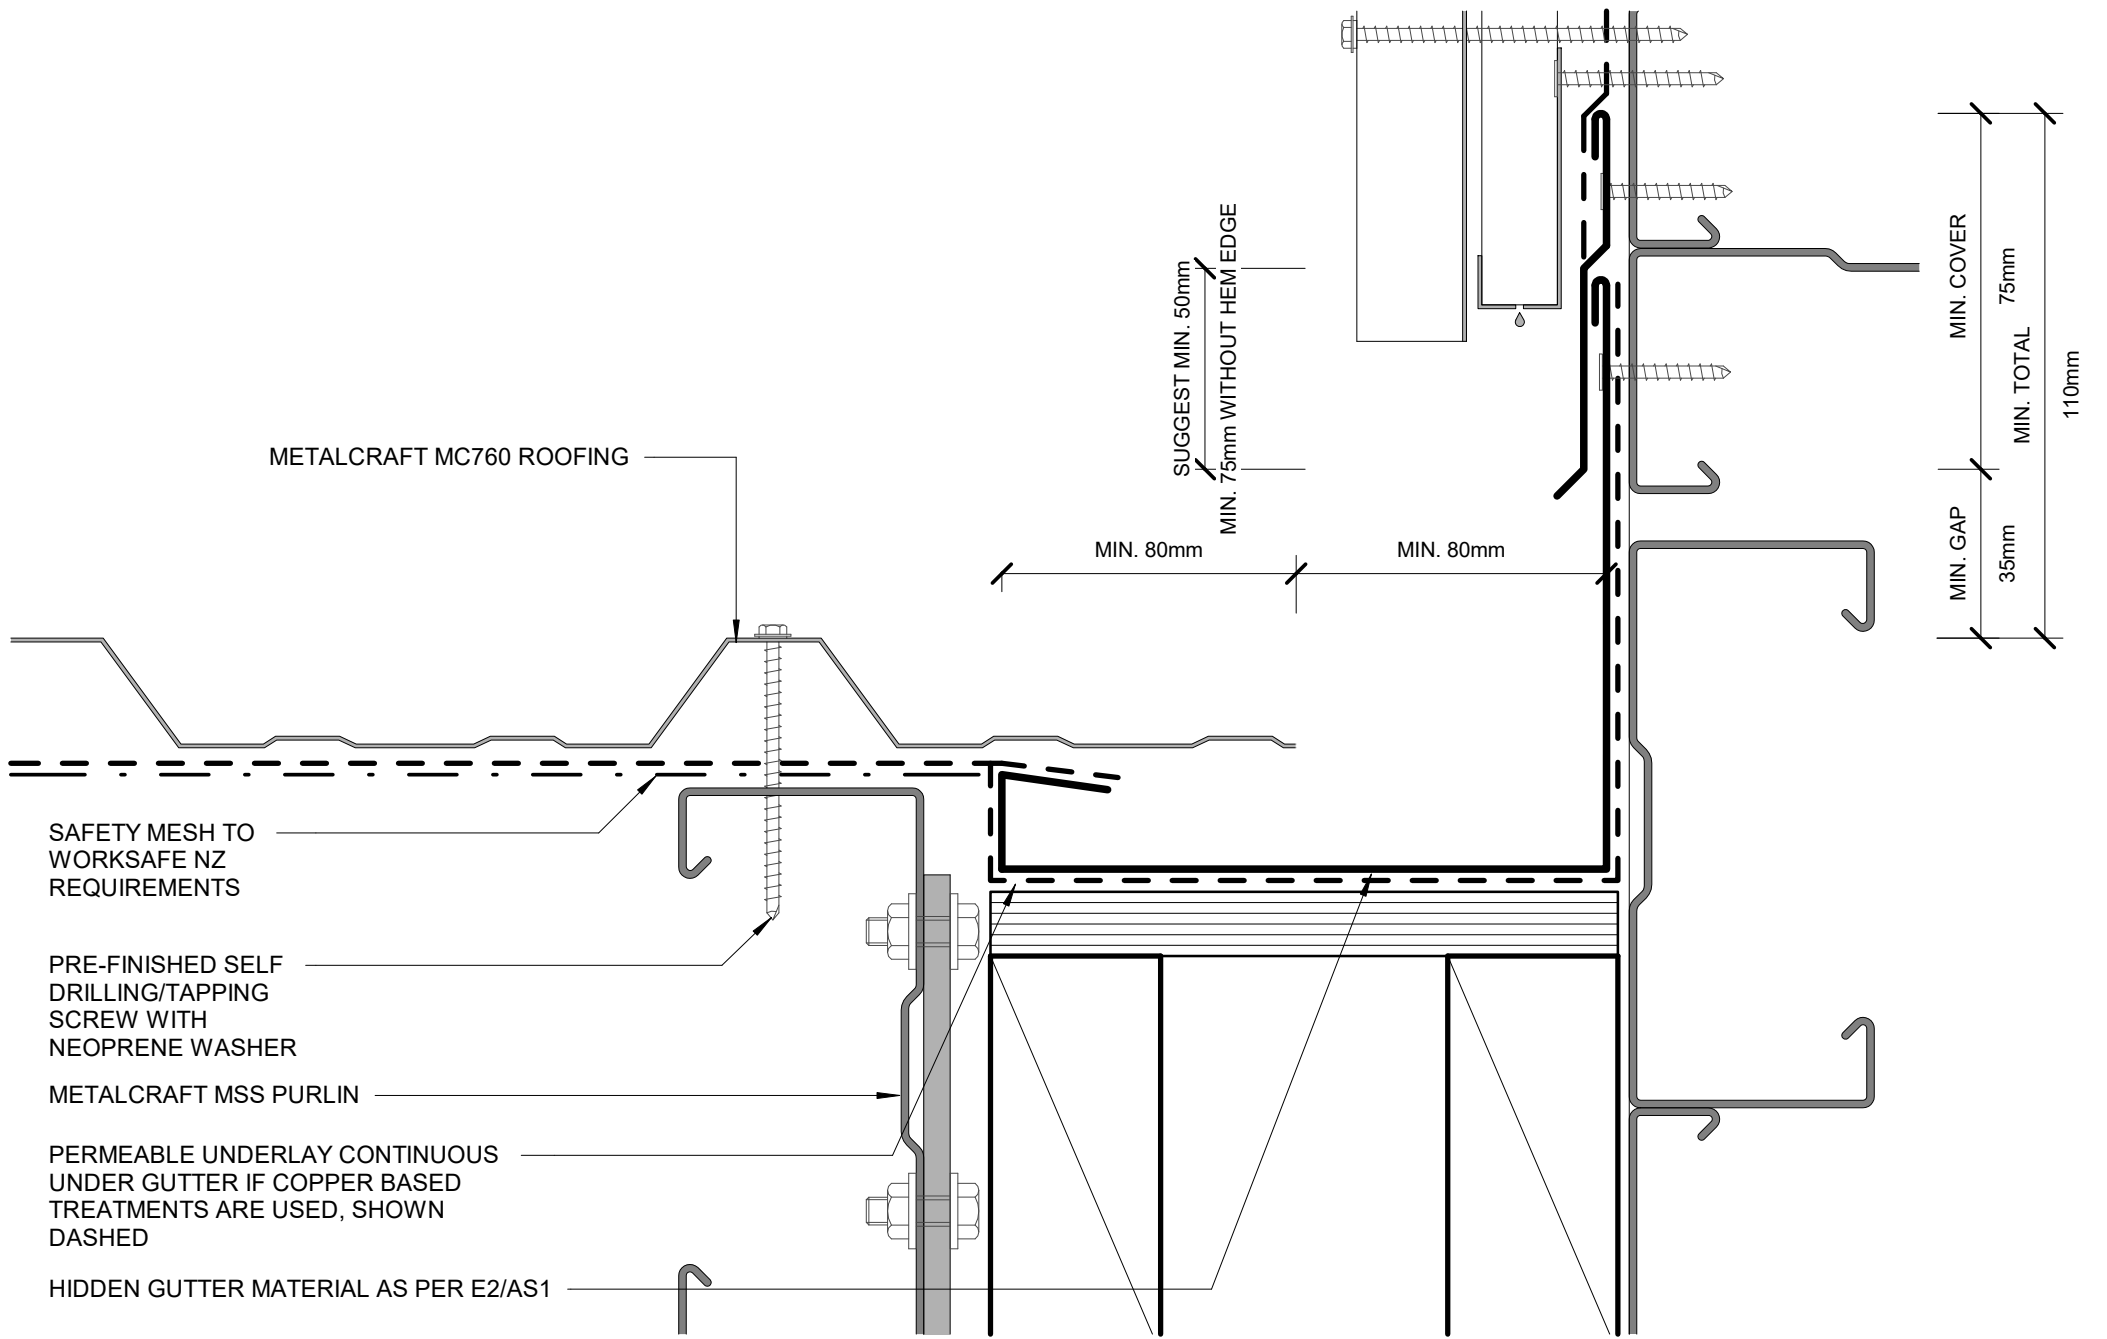


PARALLEL HIDDEN GUTTER (2 PART FLASHING)

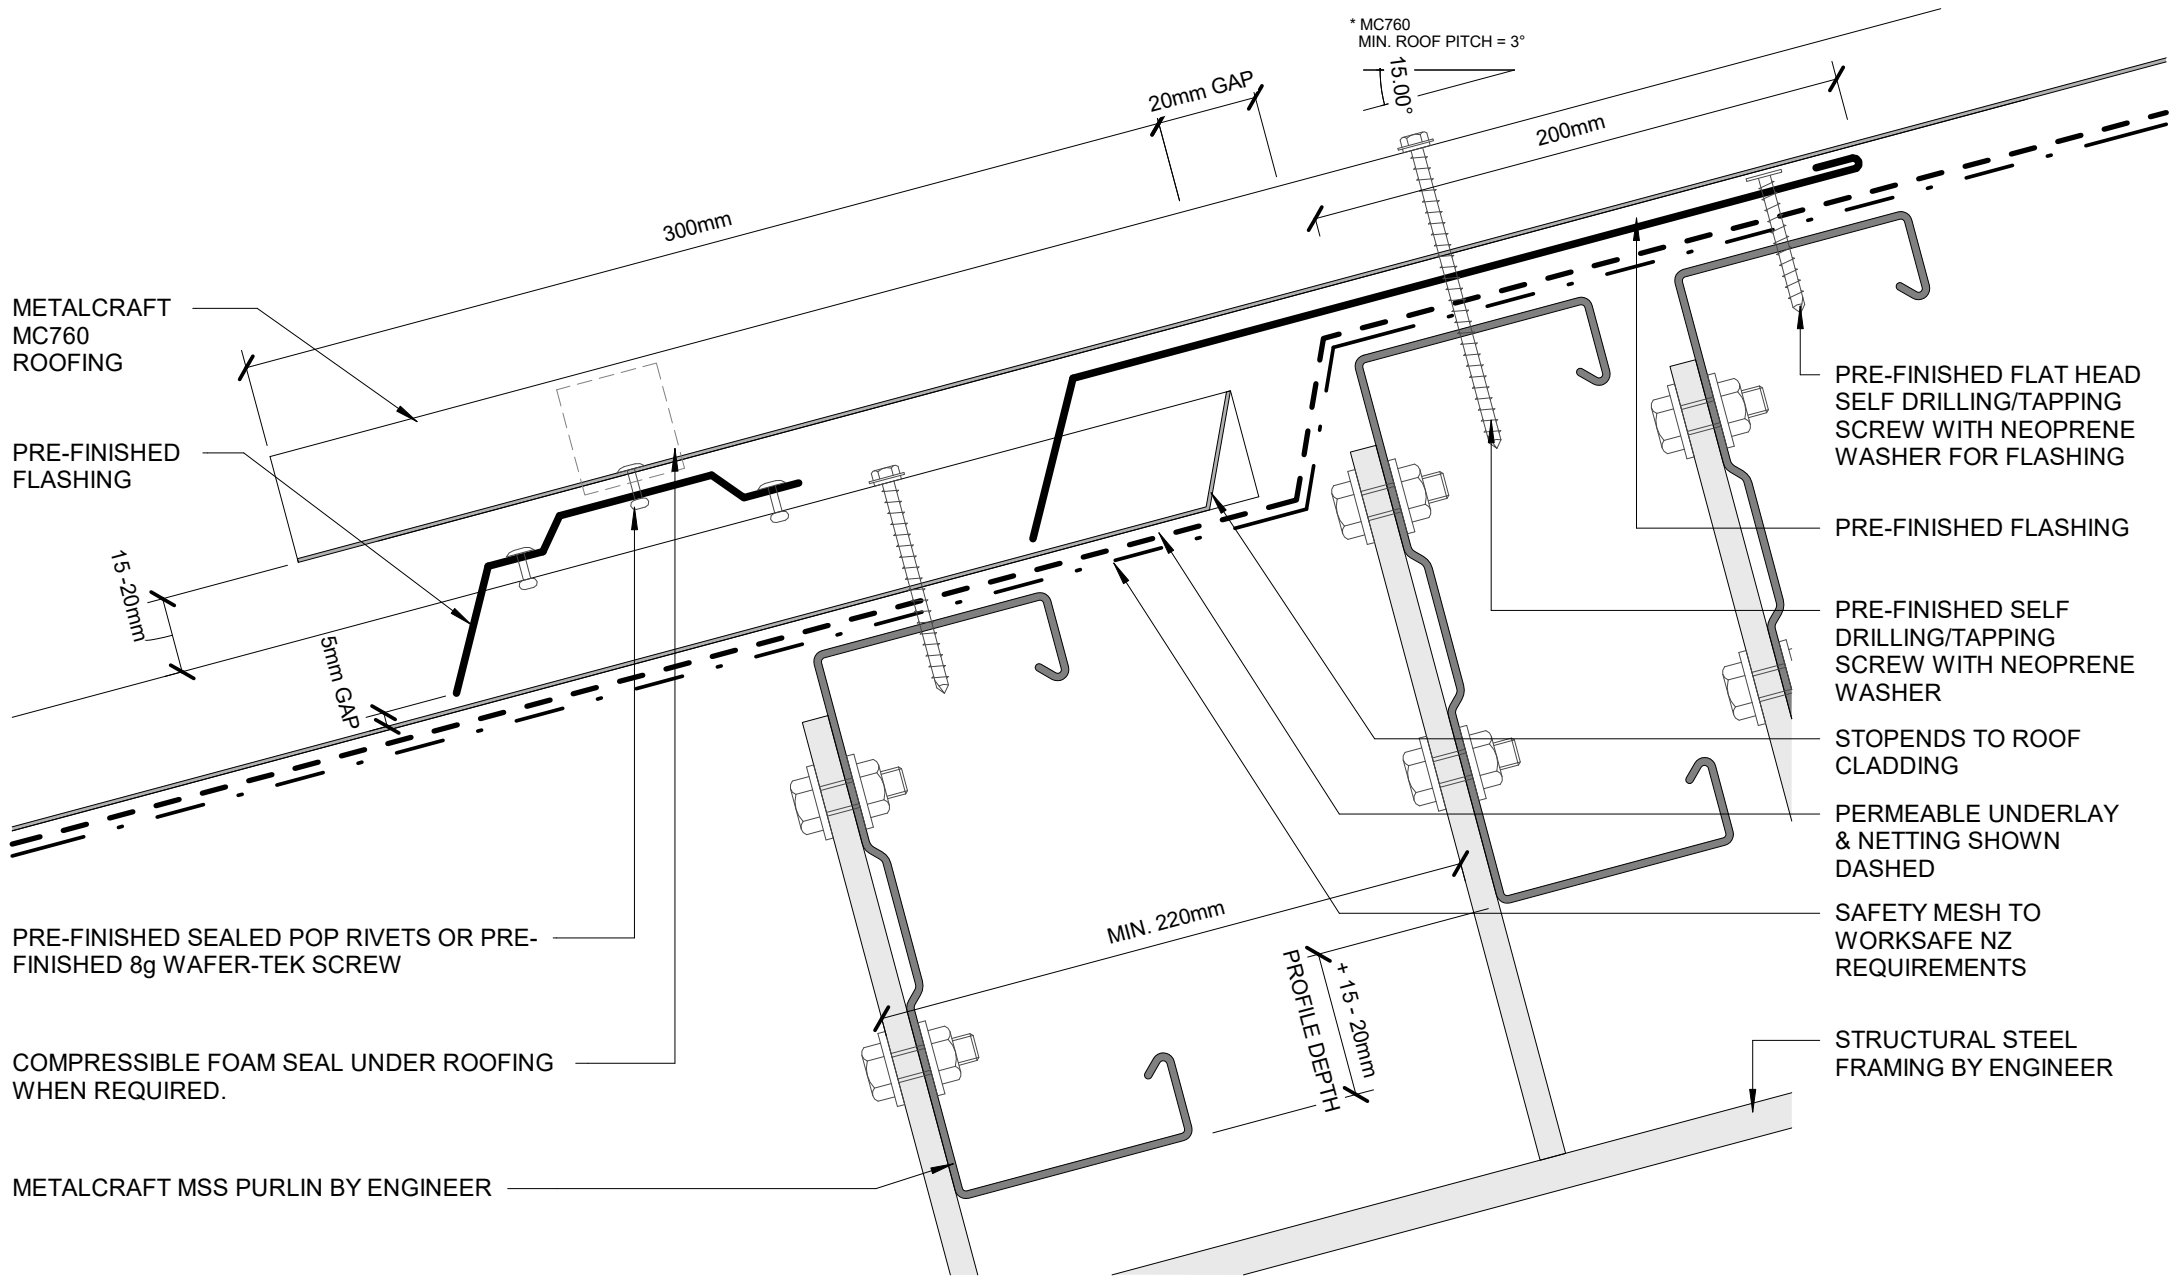

FIXING WITH PROFILED WASHER AND EPDM WASHER

METALCRAFT MC760 TRANSLUCENT SHEET INSTALLED TO MANUFACTURERS RECOMMENDATION

PURLIN PROTECTION

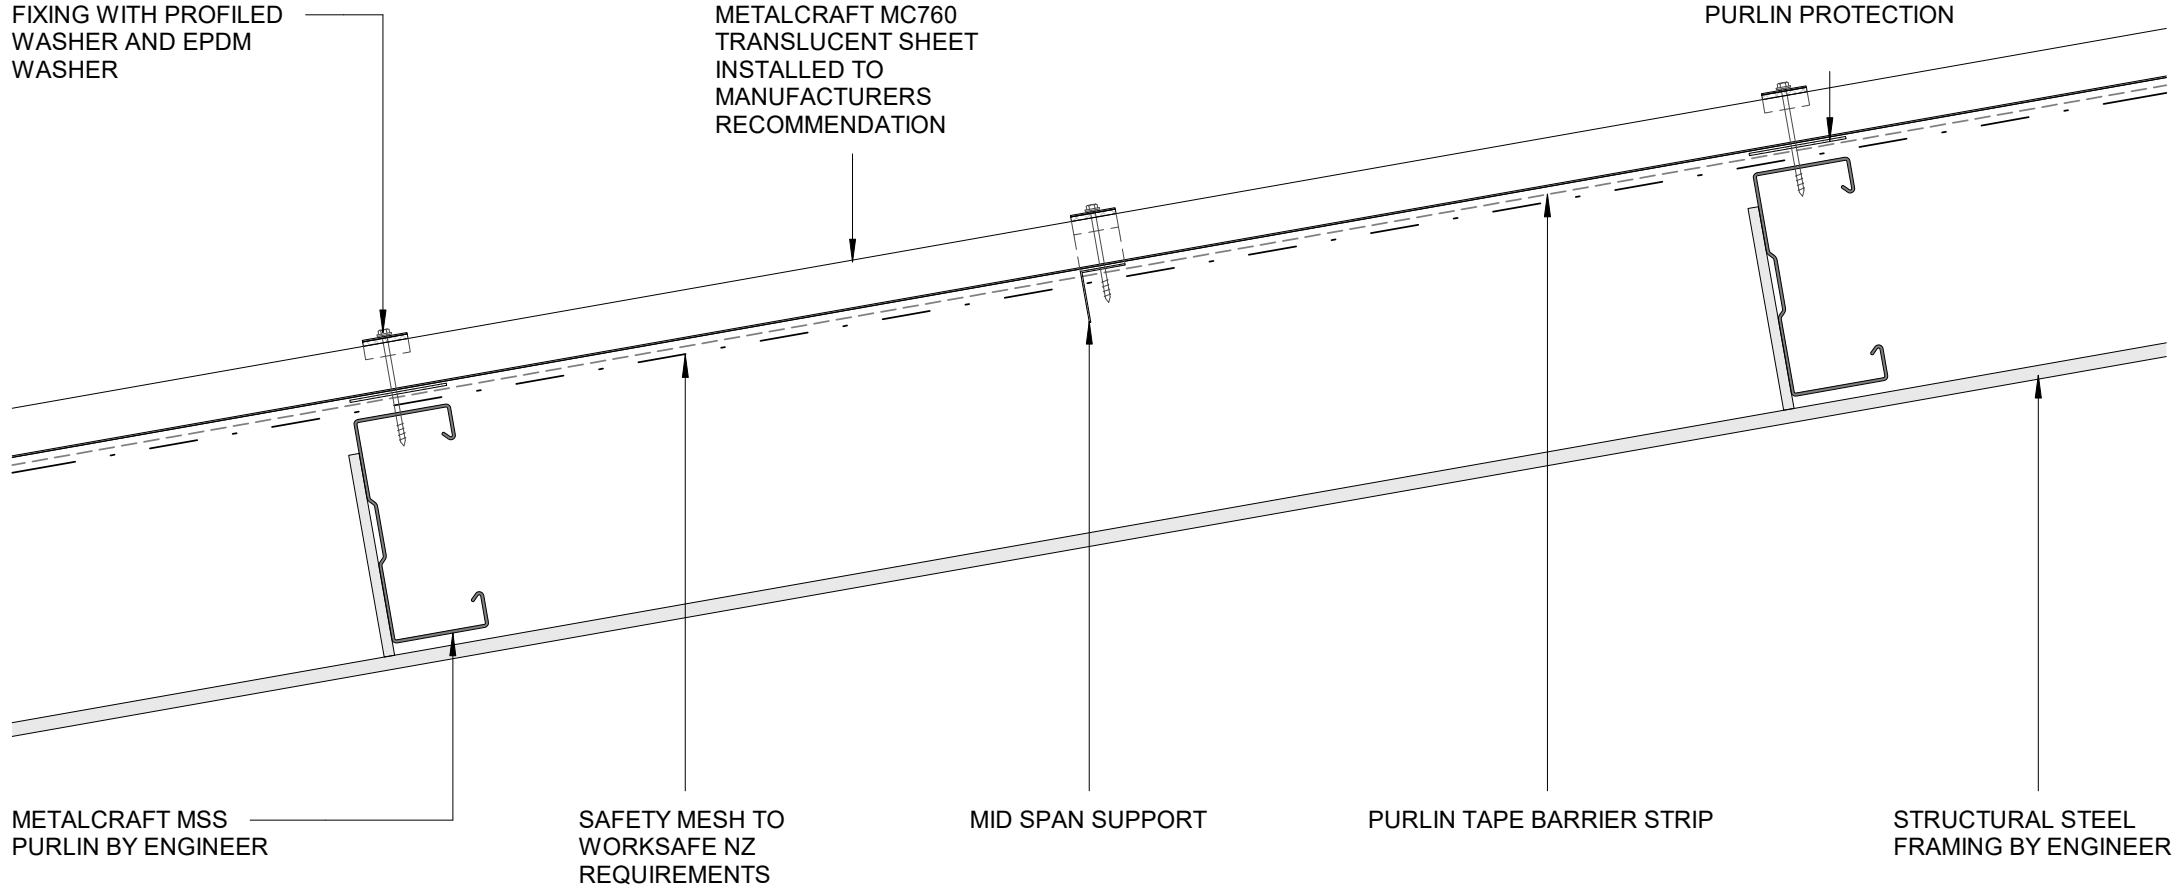

METALCRAFT MSS PURLIN BY ENGINEER

SAFETY MESH TO WORKSAFE NZ REQUIREMENTS

MID SPAN SUPPORT

PURLIN TAPE BARRIER STRIP

STRUCTURAL STEEL FRAMING BY ENGINEER




FIXING WITH PROFILED WASHER  
AND EPDM WASHER

METALCRAFT MC760  
TRANSLUCENT SHEET  
INSTALLED TO  
MANUFACTURERS  
RECOMMENDATION

PURLIN PROTECTION

METALCRAFT MC760 ROOFING

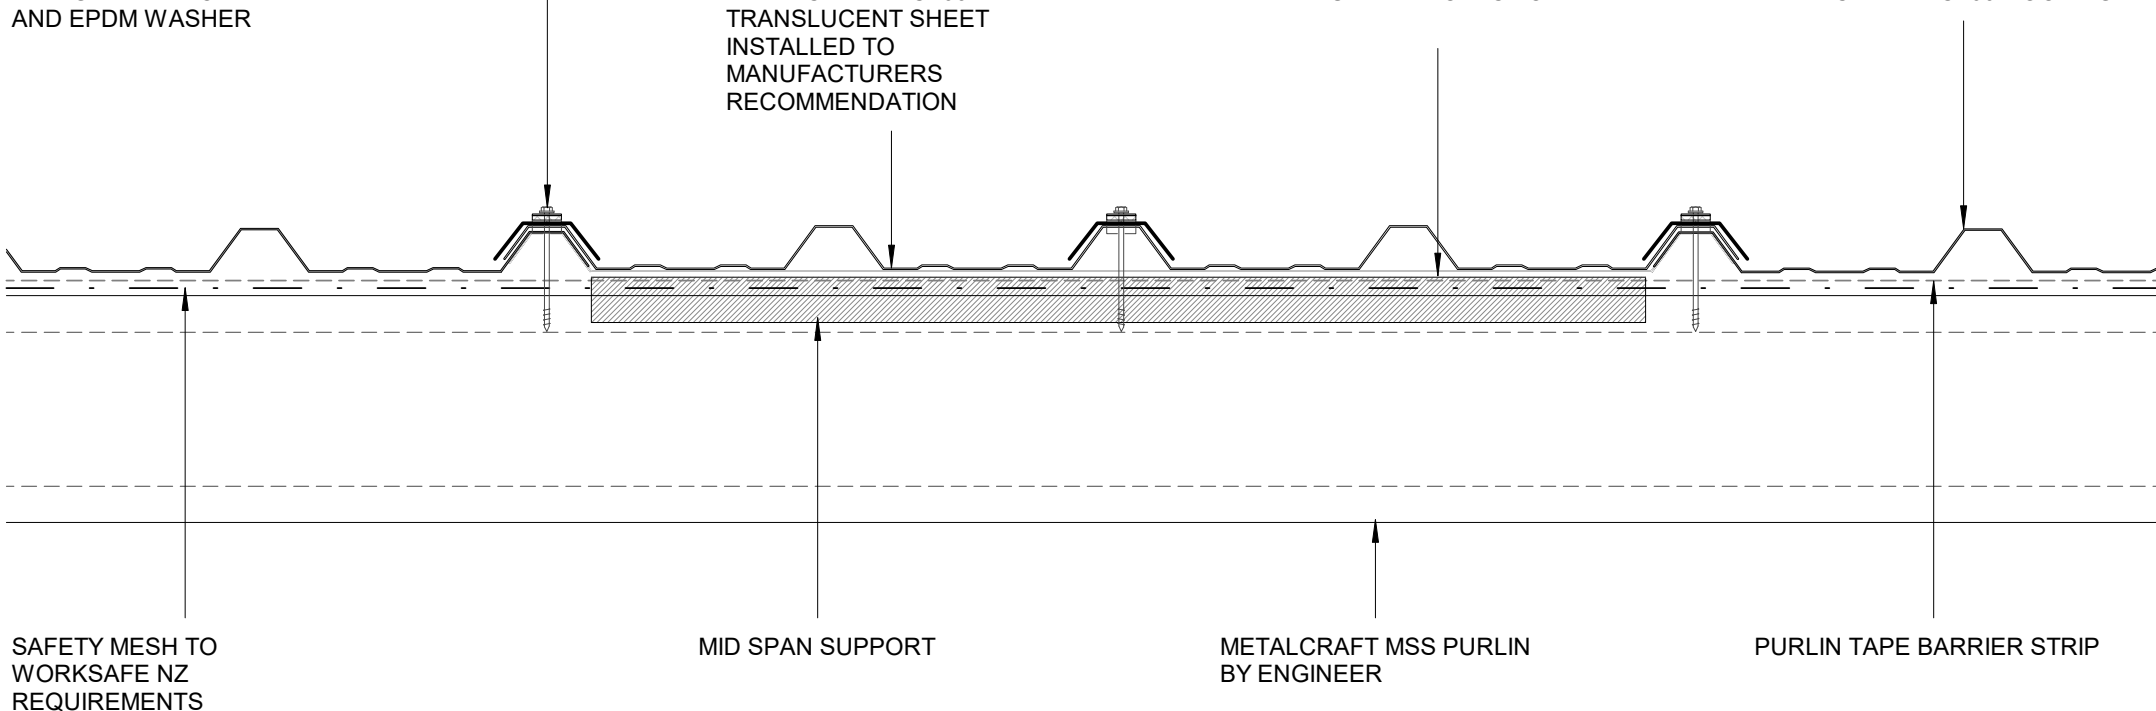

SAFETY MESH TO  
WORKSAFE NZ  
REQUIREMENTS

MID SPAN SUPPORT

METALCRAFT MSS PURLIN  
BY ENGINEER

PURLIN TAPE BARRIER STRIP

**Metalcraft**  
Roofing

www.metalcraftgroup.co.nz

DISCLAIMER:

All details are to be used for indicative purposes only and the designer should consult both the MRM code of practice version 3.0 / 2022, E2 and all other relevant building codes. Details of the supporting mechanisms are indicative only. Compliance of the supporting mechanisms is the responsibility of the designer. Construction detail can vary for wall cladding. The underlay is detailed as a single line for simplicity and is indicative only. Building paper type and method of installation should comply with underlay manufacturers recommendations and NZBC regulations.

MC760

Rev. 1.0

Reference CRMC760

Date JAN 2023

TRANSLUCENT SHEETS - CROSS  
COMMERCIAL ROOFING

Scale 1 : 5

Sheet **D 16 / 17**

